



All for drains

In 1990, my father Miroslav Chudej founded our company, at that time he had no idea that in less than 30 years the company will become one of the leaders manufacturers of street and floor drains.

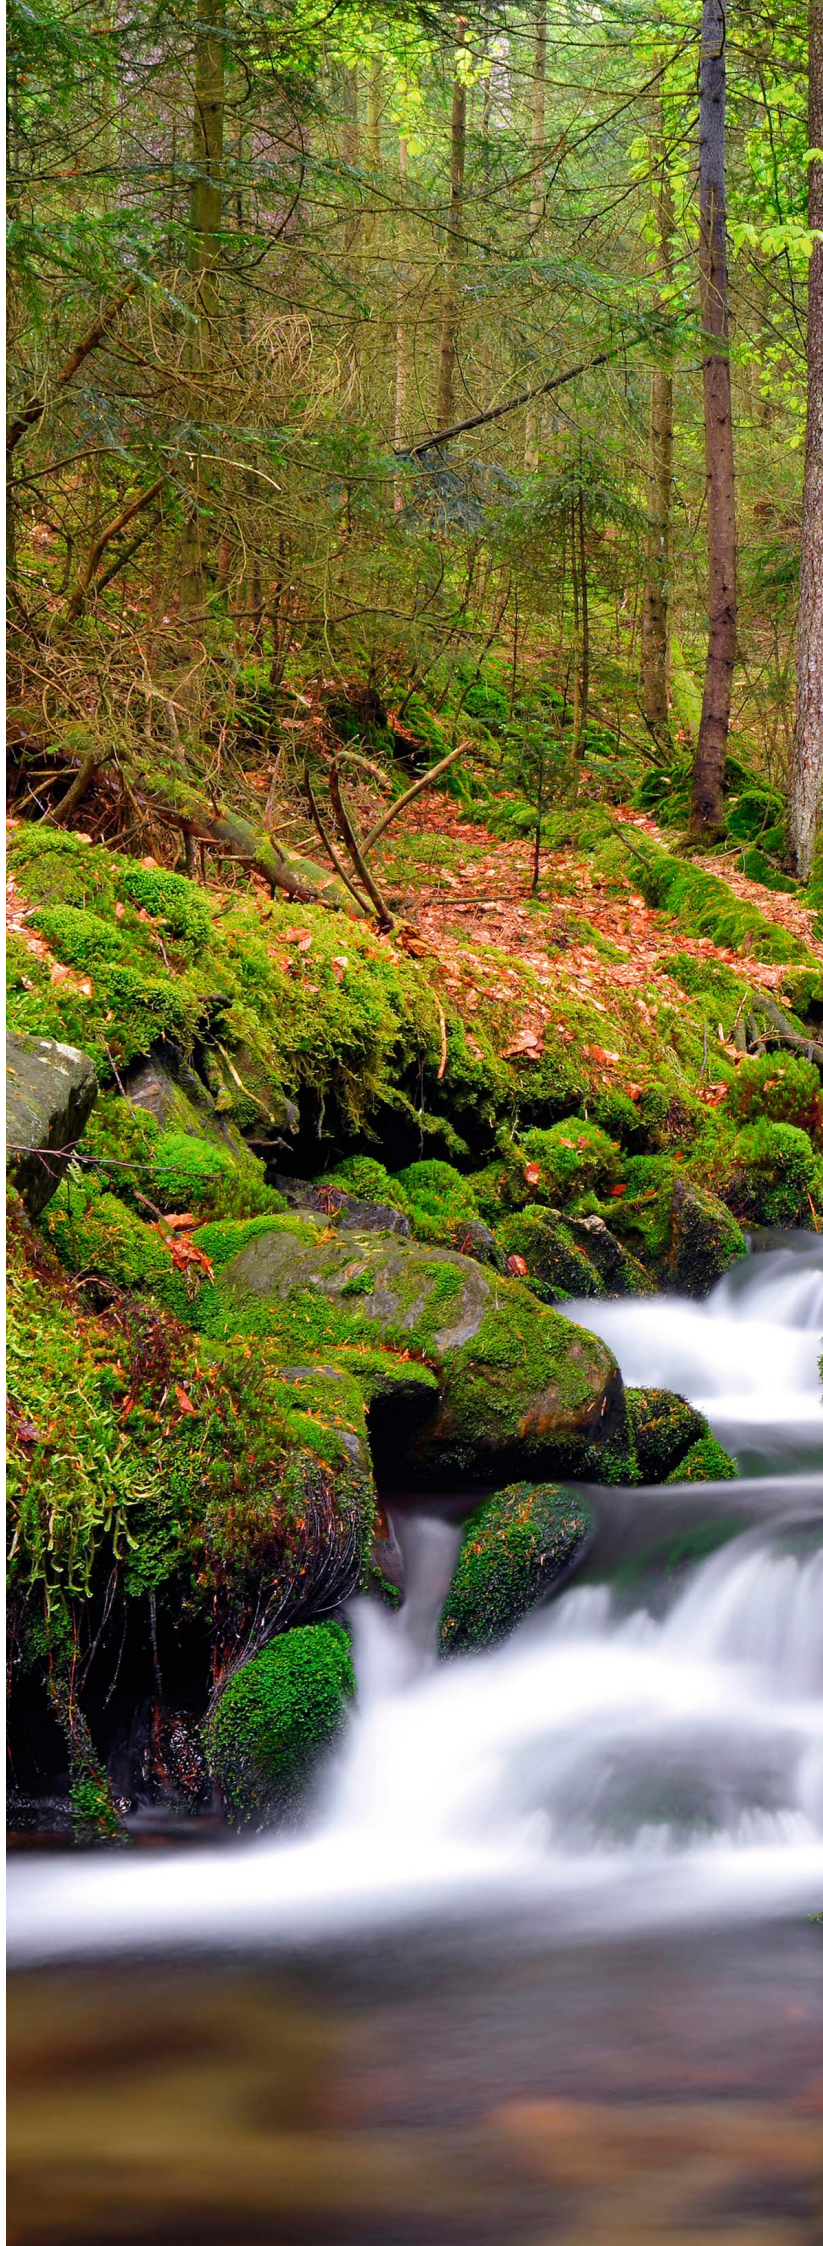
Me, as his successor I underwent everything and I started from scratch, through production to the tool shop. At that time, because of the father's enthusiasm, diligence and patience, I tried to develop and gain my own experience and prepare for further development of the company in the future.

In 2015, when my father died, I took over the company and in cooperation with the whole team of my collaborators we continue the way my father started.

At present, company Miroslav Chuděj s.r.o. sells its products not only in the Czech and Slovak Republics, but over the world.

My personal mission is to continue production quality and reliable products. Thank you to all of our customers for their cooperation.

Miroslav Chuděj
company owner





IN ACCORDANCE WITH NATURE



5-44

Floor
Drains



45-51

Rainwater
Collectors



52-63

Street
Drains



64-66

Roof
Drains



67-70

Stainless
Steel
Drainage
Channel
- COVE



71-78

Spare
Parts

Keys

Li cast iron
N stainless steel
P plastic
S dry flap
L collar
V water level
X Neptune

L grid Labyrinth
F grid Face
G grid Gate
C pedestal for tiles
S stainless steel attachment
ST standard
A drain with collar

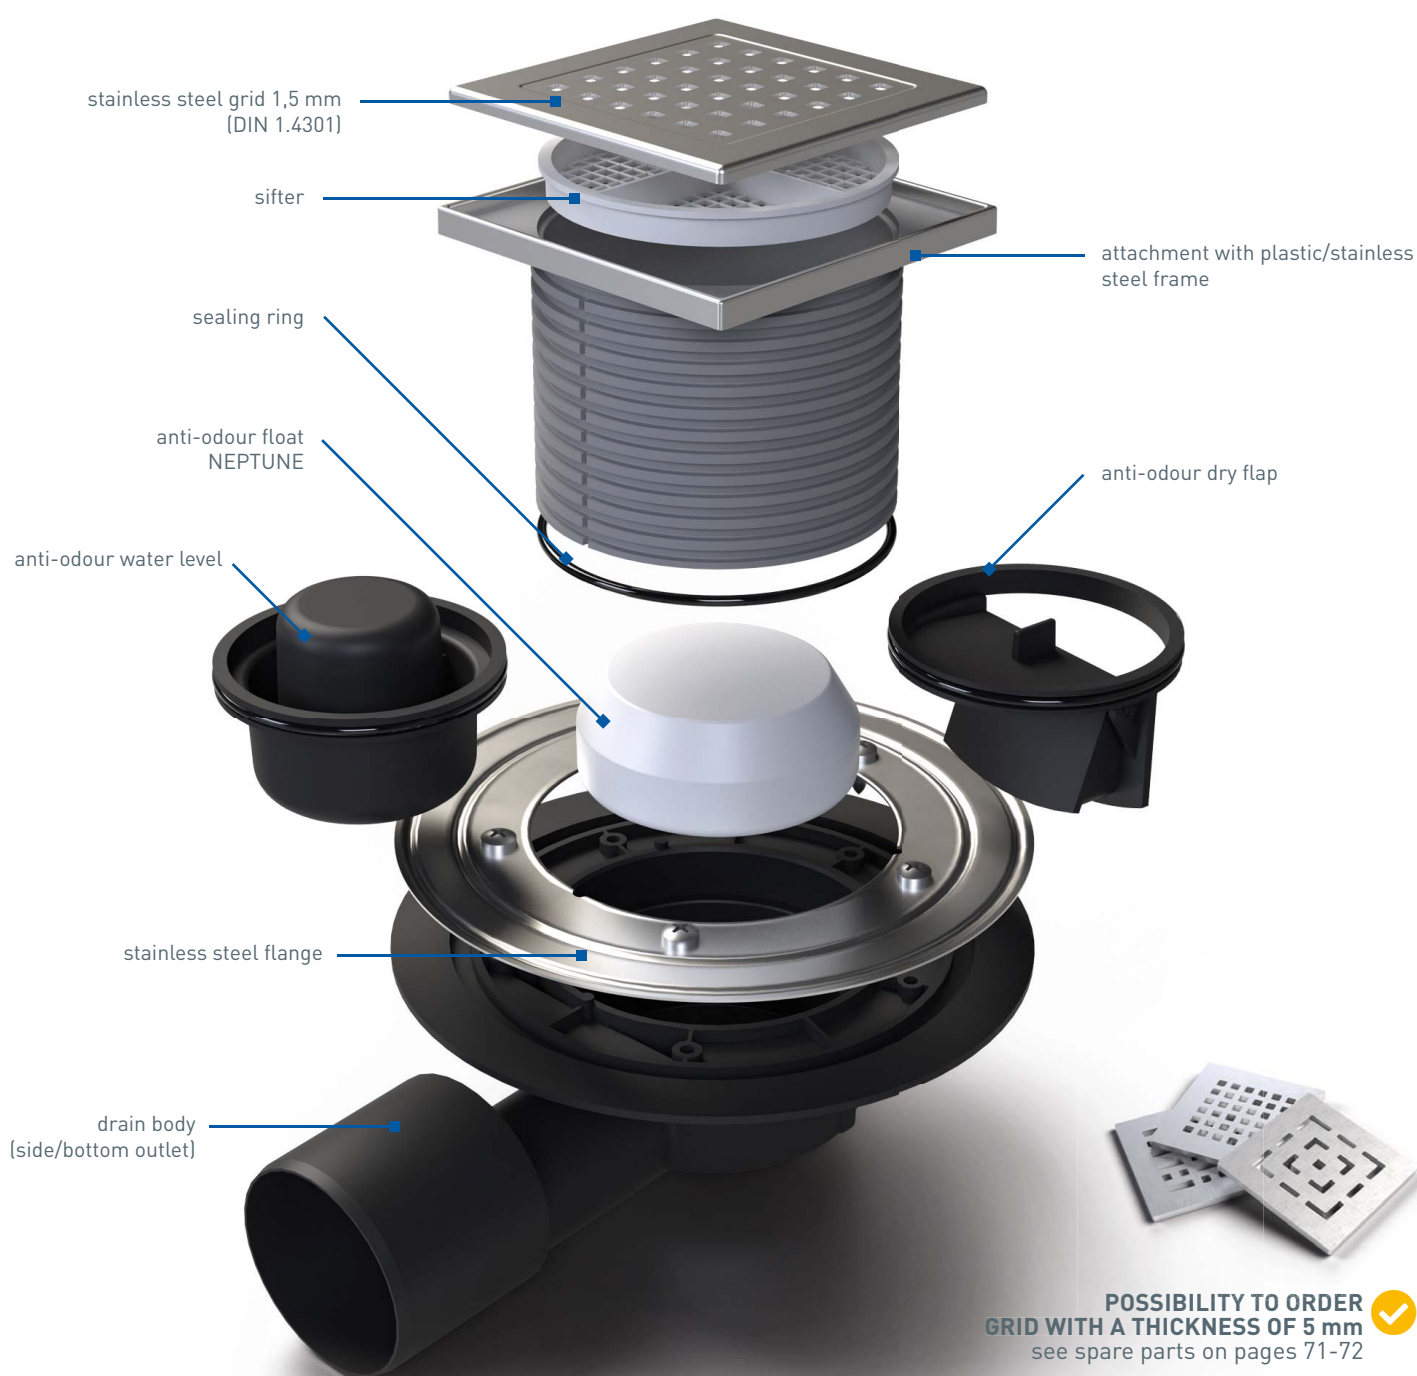
B drain with collar and flange
b white
z locking screws
s gray colour
K3 EN 1253 300 kg
L15 EN 1253 1 500 kg
B125 EN 124 12 500 kg



FLOOR DRAINS

Floor drains are made of quality materials that resist corrosion and various water temperatures. The products are made in high quality according to European standards, very easy to assemble and clean. They are designed for a piping system inside buildings that drains wastewater through a sewer connection to the public sewer or directly to the domestic wastewater treatment plant or to the septic tank.

- ✓ resistance up to 90°C
- ✓ EN 1253
- ✓ load capacity K3 - 300 kg
- ✓ load capacity L15 - 1 500 kg
- ✓ low building height from 50 mm
- ✓ made of PP and stainless steel DIN 1.4301



GRID TYPES AND CONNECTIONS 1,5 mm



100 x 100 mm

LABYRINTH



FACE



GATE



SUN



125 x 125 mm

LABYRINTH



GATE



CERAMICS



FACE



SUN



STEEL



150 x 150 mm

SUN



CERAMICS



STEEL



BOTTOM FLOOR DRAIN DN50/82 - STAINLESS STEEL


If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.

PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]

💧 **Flow rate (NEPTUNE float):** 26 l/min



320 X N
DN 50/82 X N

12/576

0,41

SIDE FLOOR DRAIN DN50/95 - STAINLESS STEEL


If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.

PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]

💧 **Flow rate (NEPTUNE float):** 29 l/min



326 X N
DN 50/95 X N

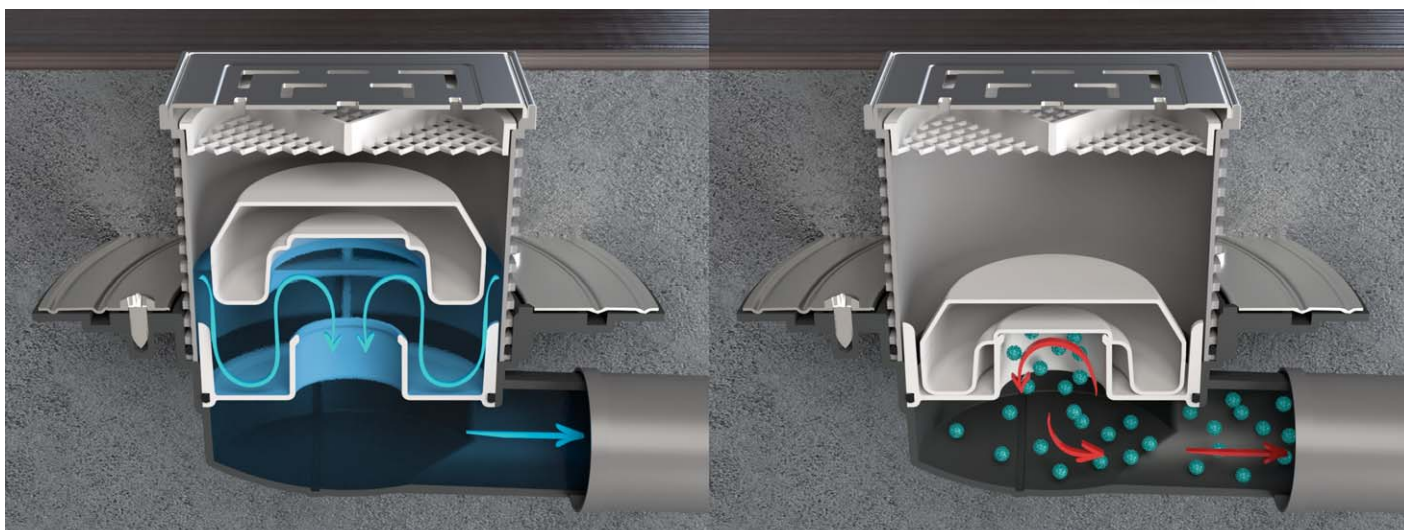
12/576

0,44

How does the NEPTUNE float work?

Our company has developed a unique system for street and floor drains, which is called NEPTUNE.

If the water level drops, or if the siphon dries out, the float will close the drain outlet to prevent the back flow of odour from the sewage line.










FLOOR DRAINS WITH NEPTUNE FLOAT



FLOOR DRAIN WITH BOTTOM OUTLET DN50 WITH A COLLAR AND PLASTIC/STAINLESS STEEL FRAME

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.

💧 Flow rate (NEPTUNE float): 27-49 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
 		L1 420 X L L1PVS 50 X L	8/192	0,57	-
		L1 420 N X L L1PVS 50 N X L	8/192	0,62	✓
 		F1 420 X L F1PVS 50 X L	8/192	0,57	-
		F1 420 N X L F1PVS 50 N X L	8/192	0,62	✓
 		G1 420 X L G1PVS 50 X L	8/192	0,57	-
		G1 420 N X L G1PVS 50 N X L	8/192	0,62	✓
 		420 X L PVS 50 X L2	8/192	0,59	-
		420 N X L PVS 50 X N L2	8/192	0,60	✓
 		440 X L PVS 50 X L4	8/192	0,70	✓
 		C 420 X L CPVS 50 X L	4/168	0,57	✓
		S 420 X L SPVS 50 X L	4/168	0,73	✓
 		C1 420 X L C1PVS 50 X L	4/168	0,72	✓
		S1 420 X L S1PVS 50 X L	4/168	0,91	✓

FLOOR DRAINS WITH NEPTUNE FLOAT



FLOOR DRAIN WITH SIDE OUTLET DN50 WITH A COLLAR AND PLASTIC/STAINLESS STEEL FRAME

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.


💧 **Flow rate (NEPTUNE float):** 26-52 l/min

**PART NUMBER
NAME**

**PACKAGING
[pcs/pallet]**

**WEIGHT
[kg/pcs]**

**STAINLESS
STEEL
FRAME**



L1 425 X L
L1PVB 50 X L

8/192

0,58


-

L1 425 N X L
L1PVB 50 N X L

8/192

0,60

✓



F1 425 X L
F1PVB 50 X L

8/192

0,58


-

F1 425 N X L
F1PVB 50 N X L

8/192

0,60

✓



G1 425 X L
G1PVB 50 X L

8/192

0,58


-

G1 425 N X L
G1PVB 50 N X L

8/192

0,60

✓



425 X L
PVB 50 X L2

8/192

0,59


-

425 N X L
PVB 50 X N L2

8/192

0,60

✓



445 X L
PVB 50 X L4


8/192

0,71

✓



Type S



C 425 X L
CPVB 50 X L

4/168

0,61

✓

S 425 X L
SPVB 50 X L


4/168

0,75

✓



Type S1



C1 425 X L
C1PVB 50 X L

4/168

0,75

✓

S1 425 X L
S1PVB 50 X L

4/168

0,92

✓








FLOOR DRAINS WITH NEPTUNE FLOAT



UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.

💧 Flow rate (NEPTUNE float): 24-44 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 388 A X L1PVBU 50/75 X	5/120	0,86	-	-
		L1 388 B X L1PVBU 50/75 PR X	5/120	1,08	-	✓
		L1 388 N A X L1PVBU 50/75 N X	5/120	0,90	✓	-
		L1 388 N B X L1PVBU 50/75 N PR X	5/120	1,11	✓	✓
		F1 388 A X F1PVBU 50/75 X	5/120	0,86	-	-
		F1 388 B X F1PVBU 50/75 PR X	5/120	1,08	-	✓
		F1 388 N A X F1PVBU 50/75 N X	5/120	0,90	✓	-
		F1 388 N B X F1PVBU 50/75 N PR X	5/120	1,11	✓	✓
		G1 388 A X G1PVBU 50/75 X	5/120	0,86	-	-
		G1 388 B X G1PVBU 50/75 PR X	5/120	1,08	-	✓
		G1 388 N A X G1PVBU 50/75 N X	5/120	0,90	✓	-
		G1 388 N B X G1PVBU 50/75 N PR X	5/120	1,11	✓	✓
		388 A X PVBU 50/75 X	5/120	0,86	-	-
		388 B X PVBU 50/75 PR X	5/120	1,08	-	✓
		388 N A X PVBU 50/75 N X	5/120	0,90	✓	-
		388 N B X PVBU 50/75 N PR X	5/120	1,11	✓	✓
		388 E X PVBU 50/75 4 X	5/120	0,92	✓	-
		388 F X PVBU 50/75 PR 4 X	5/120	1,14	✓	✓
		C 388 A X CPVBU 50/75 X	5/120	0,85	✓	-
		C 388 B X CPVBU 50/75 PR X	5/120	1,06	✓	✓
		S 388 A X SPVBU 50/75 X	5/120	1,01	✓	-
		S 388 B X SPVBU 50/75 PR X	5/120	1,22	✓	✓
		C1 388 A X C1PVBU 50/75 X	5/120	0,99	✓	-
		C1 388 B X C1PVBU 50/75 PR X	5/120	1,21	✓	✓
		S1 388 A X S1PVBU 50/75 X	5/120	1,17	✓	-
		S1 388 B X S1PVBU 50/75 PR X	5/120	1,39	✓	✓








FLOOR DRAINS WITH NEPTUNE FLOAT



UNIVERSAL MULTI-INLET FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253.

💧 Flow rate (NEPTUNE float): 24-44 l/min








		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 427 A X L1PVP 50/75 X	5/120	0,88	-	-
		L1 427 B X L1PVP 50/75 PR X	5/120	1,09	-	✓
		L1 427 N A X L1PVP 50/75 N X	5/120	0,92	✓	-
		L1 427 N B X L1PVP 50/75 N PR X	5/120	1,14	✓	✓
		F1 427 A X F1PVP 50/75 X	5/120	0,88	-	-
		F1 427 B X F1PVP 50/75 PR X	5/120	1,09	-	✓
		F1 427 N A X F1PVP 50/75 N X	5/120	0,92	✓	-
		F1 427 N B X F1PVP 50/75 N PR X	5/120	1,14	✓	✓
		G1 427 A X G1PVP 50/75 X	5/120	0,88	-	-
		G1 427 B X G1PVP 50/75 PR X	5/120	1,09	-	✓
		G1 427 N A X G1PVP 50/75 N X	5/120	0,92	✓	-
		G1 427 N B X G1PVP 50/75 N PR X	5/120	1,14	✓	✓
		427 A X PVP 50/75 X	5/120	0,88	-	-
		427 B X PVP 50/75 PR X	5/120	1,09	-	✓
		427 N A X PVP 50/75 N X	5/120	0,92	✓	-
		427 N B X PVP 50/75 N PR X	5/120	1,14	✓	✓
		447 A X PVP 50/75 4 X	5/120	0,94	✓	-
		447 B X PVP 50/75 PR4 X	5/120	1,16	✓	✓
		C 427 A X CPVP 50/75 X	5/120	0,87	✓	-
		C 427 B X CPVP 50/75 PR X	5/120	1,08	✓	✓
		S 427 A X SPVP 50/75 X	5/120	1,02	✓	-
		S 427 B X SPVP 50/75 PR X	5/120	1,24	✓	✓
		C1 427 A X C1PVP 50/75 X	5/120	0,97	✓	-
		C1 427 B X C1PVP 50/75 PR X	5/120	1,19	✓	✓
		S1 427 A X S1PVP 50/75 X	5/120	1,16	✓	-
		S1 427 B X S1PVP 50/75 PR X	5/120	1,38	✓	✓



UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN40 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.








- Flow rate (dry flap): 56-70 l/min
- Flow rate (water level): 25-32 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 382 A L1PVBU 40	8/160	0,80	-	-
		L1 382 B L1PVBU 40 PR	8/160	0,98	-	✓
		L1 382 N A L1PVBU 40 N	8/160	0,83	✓	-
		L1 382 N B L1PVBU 40 N PR	8/160	1,01	✓	✓
		F1 382 A F1PVBU 40	8/160	0,78	-	-
		F1 382 B F1PVBU 40 PR	8/160	0,97	-	✓
		F1 382 N A F1PVBU 40 N	8/160	0,81	✓	-
		F1 382 N B F1PVBU 40 N PR	8/160	0,99	✓	✓
		G1 382 A G1PVBU 40	8/160	0,80	-	-
		G1 382 B G1PVBU 40 PR	8/160	0,98	-	✓
		G1 382 N A G1PVBU 40 N	8/160	0,82	✓	-
		G1 382 N B G1PVBU 40 N PR	8/160	1,00	✓	✓
		382 A PVBU 40	8/160	0,77	-	-
		382 B PVBU 40 PR	8/160	1,04	-	✓
		382 N A PVBU 40 N	8/160	0,79	✓	-
		382 N B PVBU 40 N PR	8/160	0,97	✓	✓
		382 E PVBU 40 4	8/160	1,25	✓	-
		382 F PVBU 40 PR4	8/160	1,46	✓	✓
		C 382 A CPVBU 40	8/160	0,82	✓	-
		C 382 B CPVBU 40 PR	8/160	1,09	✓	✓
		S 382 A SPVBU 40	8/160	0,98	✓	-
		S 382 B SPVBU 40 PR	8/160	1,19	✓	✓
		C1 382 A C1PVBU 40	8/160	0,93	✓	-
		C1 382 B C1PVBU 40 PR	8/160	1,15	✓	✓
		S1 382 A S1PVBU 40	8/160	1,12	✓	-
		S1 382 B S1PVBU 40 PR	8/160	1,33	✓	✓

UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.










- Flow rate (dry flap): 68-82 l/min
- Flow rate (water level): 30-37 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 381 A L1PVBU 50	8/160	0,91	-	-
		L1 381 B L1PVBU 50 PR	8/160	1,12	-	✓
		L1 381 N A L1PVBU 50 N	8/160	0,93	✓	-
		L1 381 N B L1PVBU 50 N PR	8/160	1,13	✓	✓
		F1 381 A F1PVBU 50	8/160	0,89	-	-
		F1 381 B F1PVBU 50 PR	8/160	1,10	-	✓
		F1 381 N A F1PVBU 50 N	8/160	0,93	✓	-
		F1 381 N B F1PVBU 50 N PR	8/160	1,13	✓	✓
		G1 381 A G1PVBU 50	8/160	0,91	-	-
		G1 381 B G1PVBU 50 PR	8/160	1,12	-	✓
		G1 381 N A G1PVBU 50 N	8/160	0,93	✓	-
		G1 381 N B G1PVBU 50 N PR	8/160	1,13	✓	✓
		381 A PVBU 50	8/160	0,87	-	-
		381 B PVBU 50 PR	8/160	1,14	-	✓
		381 N A PVBU 50 N	8/160	0,93	✓	-
		381 N B PVBU 50 N PR	8/160	1,13	✓	✓
		381 E PVBU 50 4	8/160	0,91	✓	-
		381 F PVBU 50 PR4	8/160	1,10	✓	✓
		C 381 A CPVBU 50	4/120	0,92	✓	-
		C 381 B CPVBU 50 PR	4/120	1,19	✓	✓
		S 381 A SPVBU 50	4/120	1,05	✓	-
		S 381 B SPVBU 50 PR	4/120	1,26	✓	✓
		C1 381 A C1PVBU 50	4/120	1,04	✓	-
		C1 381 B C1PVBU 50 PR	4/120	1,25	✓	✓
		S1 381 A S1PVBU 50	4/120	1,18	✓	-
		S1 381 B S1PVBU 50 PR	4/120	1,40	✓	✓

UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.








- Flow rate (dry flap): 64-80 l/min
- Flow rate (water level): 29-36 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 388 A L1PVBU 50/75	5/120	0,90	-	-
		L1 388 B L1PVBU 50/75 PR	5/120	1,11	-	✓
		L1 388 N A L1PVBU 50/75 N	5/120	0,94	✓	-
		L1 388 N B L1PVBU 50/75 N PR	5/120	1,15	✓	✓
		F1 388 A F1PVBU 50/75	5/120	0,90	-	-
		F1 388 B F1PVBU 50/75 PR	5/120	1,11	-	✓
		F1 388 N A F1PVBU 50/75 N	5/120	0,94	✓	-
		F1 388 N B F1PVBU 50/75 N PR	5/120	1,15	✓	✓
		G1 388 A G1PVBU 50/75	5/120	0,90	-	-
		G1 388 B G1PVBU 50/75 PR	5/120	1,11	-	✓
		G1 388 N A G1PVBU 50/75 N	5/120	0,94	✓	-
		G1 388 N B G1PVBU 50/75 N PR	5/120	1,15	✓	✓
		388 A PVBU 50/75	5/120	0,90	-	-
		388 B PVBU 50/75 PR	5/120	1,11	-	✓
		388 N A PVBU 50/75 N	5/120	0,94	✓	-
		388 N B PVBU 50/75 N PR	5/120	1,15	✓	✓
		388 E PVBU 50/75 4	5/120	0,95	✓	-
		388 F PVBU 50/75 PR4	5/120	1,16	✓	✓
		C 388 A CPVBU 50/75	5/120	0,88	✓	-
		C 388 B CPVBU 50/75 PR	5/120	1,08	✓	✓
		S 388 A SPVBU 50/75	5/120	1,06	✓	-
		S 388 B SPVBU 50/75 PR	5/120	1,28	✓	✓
		C1 388 A C1PVBU 50/75	5/120	1,03	✓	-
		C1 388 B C1PVBU 50/75 PR	5/120	1,24	✓	✓
		S1 388 A S1PVBU 50/75	5/120	1,18	✓	-
		S1 388 B S1PVBU 50/75 PR	5/120	1,39	✓	✓

UNIVERSAL MULTI-INLET FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.









- Flow rate (dry flap): 64-80 l/min
- Flow rate (water level): 29-36 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 427 A L1PVP 50/75	5/120	0,93	-	-
		L1 427 B L1PVP 50/75 PR	5/120	1,14	-	✓
		L1 427 N A L1PVP 50/75 N	5/120	0,96	✓	-
		L1 427 N B L1PVP 50/75 N PR	5/120	1,17	✓	✓
		F1 427 A F1PVP 50/75	5/120	0,93	-	-
		F1 427 B F1PVP 50/75 PR	5/120	1,14	-	✓
		F1 427 N A F1PVP 50/75 N	5/120	0,96	✓	-
		F1 427 N B F1PVP 50/75 N PR	5/120	1,17	✓	✓
		G1 427 A G1PVP 50/75	5/120	0,93	-	-
		G1 427 B G1PVP 50/75 PR	5/120	1,14	-	✓
		G1 427 N A G1PVP 50/75 N	5/120	0,96	✓	-
		G1 427 N B G1PVP 50/75 N PR	5/120	1,17	✓	✓
		427 A PVP 50/75	5/120	0,93	-	-
		427 B PVP 50/75 PR	5/120	1,14	-	✓
		427 N A PVP 50/75 N	5/120	0,96	✓	-
		427 N B PVP 50/75 N PR	5/120	1,17	✓	✓
		447 A PVP 50/75 4	5/120	0,98	✓	-
		447 B PVP 50/75 PR4	5/120	1,20	✓	✓
		C 427 A CPVP 50/75	5/120	0,91	✓	-
		C 427 B CPVP 50/75 PR	5/120	1,13	✓	✓
		S 427 A SPVP 50/75	5/120	1,07	✓	-
		S 427 B SPVP 50/75 PR	5/120	1,28	✓	✓
		C1 427 A C1PVP 50/75	5/120	1,08	✓	-
		C1 427 B C1PVP 50/75 PR	5/120	1,29	✓	✓
		S1 427 A S1PVP 50/75	5/120	1,26	✓	-
		S1 427 B S1PVP 50/75 PR	5/120	1,47	✓	✓

UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN40 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.








- Flow rate (dry flap): 56-70 l/min
- Flow rate (water level): 30-37 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 383 A L1PVSU 40	4/120	0,99	-	-
		L1 383 B L1PVSU 40 PR	4/120	1,03	-	✓
		L1 383 N A L1PVSU 40 N	4/120	0,99	✓	-
		L1 383 N B L1PVSU 40 N PR	4/120	1,02	✓	✓
		F1 383 A F1PVSU 40	4/120	0,77	-	-
		F1 383 B F1PVSU 40 PR	4/120	0,98	-	✓
		F1 383 N A F1PVSU 40 N	4/120	0,81	✓	-
		F1 383 N B F1PVSU 40 N PR	4/120	1,02	✓	✓
		G1 383 A G1PVSU 40	4/120	0,98	-	-
		G1 383 B G1PVSU 40 PR	4/120	1,01	-	✓
		G1 383 N A G1PVSU 40 N	4/120	0,99	✓	-
		G1 383 N B G1PVSU 40 N PR	4/120	1,00	✓	✓
		383 A PVSU 40	4/120	0,76	-	-
		383 B PVSU 40 PR	4/120	0,97	-	✓
		383 N A PVSU 40 N	4/120	0,77	✓	-
		383 N B PVSU 40 N PR	4/120	1,01	✓	✓
		383 E PVSU 40 4	4/120	0,85	✓	-
		383 F PVSU 40 PR4	4/120	0,96	✓	✓
		C 383 A CPVSU 40	4/120	0,81	✓	-
		C 383 B CPVSU 40 PR	4/120	1,02	✓	✓
		S 383 A SPVSU 40	4/120	0,99	✓	-
		S 383 B SPVSU 40 PR	4/120	1,20	✓	✓
		C1 383 A C1PVSU 40	4/120	0,94	✓	-
		C1 383 B C1PVSU 40 PR	4/120	1,15	✓	✓
		S1 383 A S1PVSU 40	4/120	1,12	✓	-
		S1 383 B S1PVSU 40 PR	4/120	1,34	✓	✓

UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN50 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.









- Flow rate (dry flap): 56-70 l/min
- Flow rate (water level): 30-37 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 384 A L1PVSU 50	4/120	0,80	-	-
		L1 384 B L1PVSU 50 PR	4/120	1,01	-	✓
		L1 384 N A L1PVSU 50 N	4/120	0,85	✓	-
		L1 384 N B L1PVSU 50 N PR	4/120	1,05	✓	✓
		F1 384 A F1PVSU 50	4/120	0,81	-	-
		F1 384 B F1PVSU 50 PR	4/120	1,02	-	✓
		F1 384 N A F1PVSU 50 N	4/120	0,84	✓	-
		F1 384 N B F1PVSU 50 N PR	4/120	1,05	✓	✓
		G1 384 A G1PVSU 50	4/120	0,80	-	-
		G1 384 B G1PVSU 50 PR	4/120	1,05	-	✓
		G1 384 N A G1PVSU 50 N	4/120	0,85	✓	-
		G1 384 N B G1PVSU 50 N PR	4/120	1,05	✓	✓
		384 A PVSU 50	4/120	0,79	-	-
		384 B PVSU 50 PR	4/120	1,00	-	✓
		384 N A PVSU 50 N	4/120	0,81	✓	-
		384 N B PVSU 50 N PR	4/120	1,02	✓	✓
		384 E PVSU 50 4	4/120	0,78	✓	-
		384 F PVSU 50 PR4	4/120	1,01	✓	✓
		C 384 A CPVSU 50	4/120	0,84	✓	-
		C 384 B CPVSU 50 PR	4/120	1,05	✓	✓
		S 384 A SPVSU 50	4/120	0,99	✓	-
		S 384 B SPVSU 50 PR	4/120	1,20	✓	✓
		C1 384 A C1PVSU 50	4/120	0,98	✓	-
		C1 384 B C1PVSU 50 PR	4/120	1,19	✓	✓
		S1 384 A S1PVSU 50	4/120	1,16	✓	-
		S1 384 B S1PVSU 50 PR	4/120	1,37	✓	✓

UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN75 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.








- Flow rate (dry flap): 58-72 l/min
- Flow rate (water level): 32-39 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 385 A L1PVSU 75	4/120	0,81	-	-
		L1 385 B L1PVSU 75 PR	4/120	1,02	-	✓
		L1 385 N A L1PVSU 75 N	4/120	0,83	✓	-
		L1 385 N B L1PVSU 75 N PR	4/120	1,04	✓	✓
		F1 385 A F1PVSU 75	4/120	0,81	-	-
		F1 385 B F1PVSU 75 PR	4/120	1,02	-	✓
		F1 385 N A F1PVSU 75 N	4/120	0,83	✓	-
		F1 385 N B F1PVSU 75 N PR	4/120	1,04	✓	✓
		G1 385 A G1PVSU 75	4/120	0,81	-	-
		G1 385 B G1PVSU 75 PR	4/120	1,02	-	✓
		G1 385 N A G1PVSU 75 N	4/120	0,83	✓	-
		G1 385 N B G1PVSU 75 N PR	4/120	1,04	✓	✓
		385 A PVSU 75	4/120	0,78	-	-
		385 B PVSU 75 PR	4/120	1,00	-	✓
		385 N A PVSU 75 N	4/120	0,81	✓	-
		385 N B PVSU 75 N PR	4/120	1,03	✓	✓
		385 E PVSU 75 4	4/120	0,81	✓	-
		385 F PVSU 75 PR4	4/120	1,05	✓	✓
		C 385 A CPVSU 75	4/120	0,83	✓	-
		C 385 B CPVSU 75 PR	4/120	1,05	✓	✓
		S 385 A SPVSU 75	4/120	0,99	✓	-
		S 385 B SPVSU 75 PR	4/120	1,20	✓	✓
		C1 385 A C1PVSU 75	4/120	0,98	✓	-
		C1 385 B C1PVSU 75 PR	4/120	1,19	✓	✓
		S1 385 A S1PVSU 75	4/120	1,16	✓	-
		S1 385 B S1PVSU 75 PR	4/120	1,37	✓	✓

UNIVERSAL FLOOR DRAIN BOTTOM OUTLET DN110 WITH PLASTIC/STAINLESS STEEL FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.


- Flow rate (dry flap): 58-72 l/min
- Flow rate (water level): 32-39 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAIN- LESS STEEL FRAME	FLANGE
		L1 386 A L1PVSU 110	4/120	0,86	-	-
		L1 386 B L1PVSU 110 PR	4/120	1,06	-	✓
		L1 386 N A L1PVSU 110 N	4/120	0,86	✓	-
		L1 386 N B L1PVSU 110 N PR	4/120	1,08	✓	✓
		F1 386 A F1PVSU 110	4/120	0,86	-	-
		F1 386 B F1PVSU 110 PR	4/120	1,06	-	✓
		F1 386 N A F1PVSU 110 N	4/120	0,86	✓	-
		F1 386 N B F1PVSU 110 N PR	4/120	1,08	✓	✓
		G1 386 A G1PVSU 110	4/120	0,86	-	-
		G1 386 B G1PVSU 110 PR	4/120	1,09	-	✓
		G1 386 N A G1PVSU 110 N	4/120	0,88	✓	-
		G1 386 N B G1PVSU 110 N PR	4/120	1,11	✓	✓
		386 A PVSU 110	4/120	0,83	-	-
		386 B PVSU 110 PR	4/120	1,03	-	✓
		386 N A PVSU 110 N	4/120	0,85	✓	-
		386 N B PVSU 110 N PR	4/120	1,06	✓	✓
		386 E PVSU 110 4	4/120	0,84	✓	-
		386 F PVSU 110 PR4	4/120	1,01	✓	✓
		C 386 A CPVSU 110	4/120	0,88	✓	-
		C 386 B CPVSU 110 PR	4/120	1,08	✓	✓
		S 386 A SPVSU 110	4/120	0,99	✓	-
		S 386 B SPVSU 110 PR	4/120	1,20	✓	✓
		C1 386 A C1PVSU 110	4/120	0,98	✓	-
		C1 386 B C1PVSU 110 PR	4/120	1,19	✓	✓
		S1 386 A S1PVSU 110	4/120	1,16	✓	-
		S1 386 B S1PVSU 110 PR	4/120	1,37	✓	✓

FLOOR DRAIN WITH BOTTOM OUTLET DN110, 300 x 300 mm

Made of PP, load capacity K3-300 kg and L15 - 1 500 kg. Temperature resistance up to 90 °C, EN 1253, UV stabilized.

💧 Flow rate (water level): 171 l/min



PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]


220 P
PV 300 110 P

4/144

1,21

FLOOR DRAIN WITH BOTTOM OUTLET DN75/110, 250 x 250 mm

💧 Flow rate (water level): 108 l/min



PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]


221 P
PV 250 75/110 P

8/192

0,74

FLOOR DRAIN WITH BOTTOM OUTLET DN75, 200 x 200 mm

💧 Flow rate (water level): 67 l/min



PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]

222 P
PV 200 75 P


8/432

0,41

FLOOR DRAIN WITH BOTTOM OUTLET DN110

It is manufactured in two options, with a plastic grid and with a stainless steel surface. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 Flow rate (water level): 41-45 l/min



PART NUMBER
NAME

PACKAGING
[pcs/pallet]

WEIGHT
[kg/pcs]


DESIGN

323 P
DNS 110 P

9/432

0,31

black plastic




323 Pb
DNS 110 P b

9/432

0,30

white plastic



323 N
DNS 110 N

9/432

0,49


stainless steel

FLOOR DRAIN WITH BOTTOM OUTLET DN50/55

Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 **Flow rate (water level):** 40-42 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	DESIGN
---------------------	---------------------------	--------------------	--------

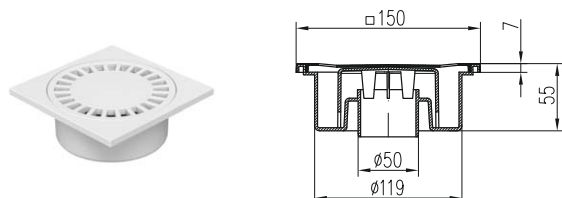


320 P
DN 50/55 P

14/924

0,21

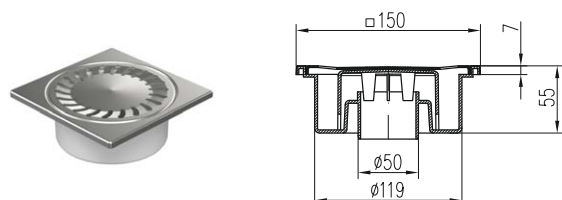white plastic



320 N
DN 50/55 N

14/924

0,36


stainless steel

FLOOR DRAIN WITH BOTTOM OUTLET DN50/84

Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 **Flow rate (water level):** 48-53 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	DESIGN
---------------------	---------------------------	--------------------	--------

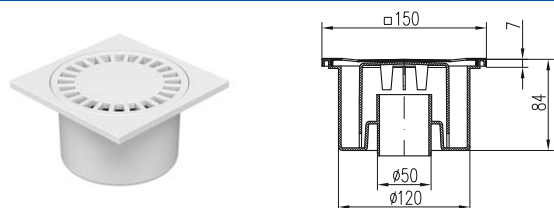


321 P
DN 50/84 P

10/480

0,29

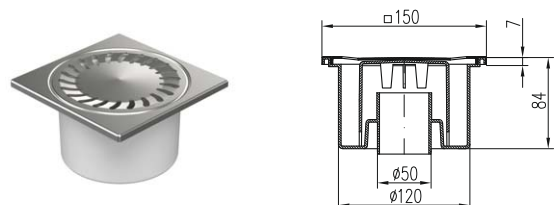white plastic



321 N
DN 50/84 N

10/480

0,47


stainless steel

FLOOR DRAIN WITH SIDE OUTLET DN50/95

Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 **Flow rate (water level):** 42-44 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	DESIGN
---------------------	---------------------------	--------------------	--------

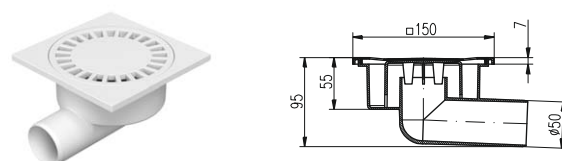


326 P
DN 50/95 P

12/576

0,25

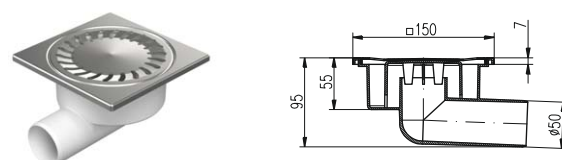white plastic



326 N
DN 50/95 N

12/576





0,43

stainless steel


FLOOR DRAIN WITH SIDE OUTLET DN50 WITH PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame.
Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg.
Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 **Flow rate (water level):** 30-42 l/min

			PART NUMBER	PACKAGING	WEIGHT	STAINLESS
			NAME	[pcs/pallet]	[kg/pcs]	STEEL FRAME
			L1 413 L1PVB 50	10/480	0,31	-
			L1 413 N L1PVB 50 N	10/480	0,31	✓
			F1 413 F1PVB 50	10/480	0,30	-
			F1 413 N F1PVB 50 N	10/480	0,30	✓
			G1 413 G1PVB 50	10/480	0,30	-
			G1 413 N G1PVB 50 N	10/480	0,30	✓
			413 PVB 50	10/480	0,34	-
			413 N PVB 50 N	10/480	0,34	✓




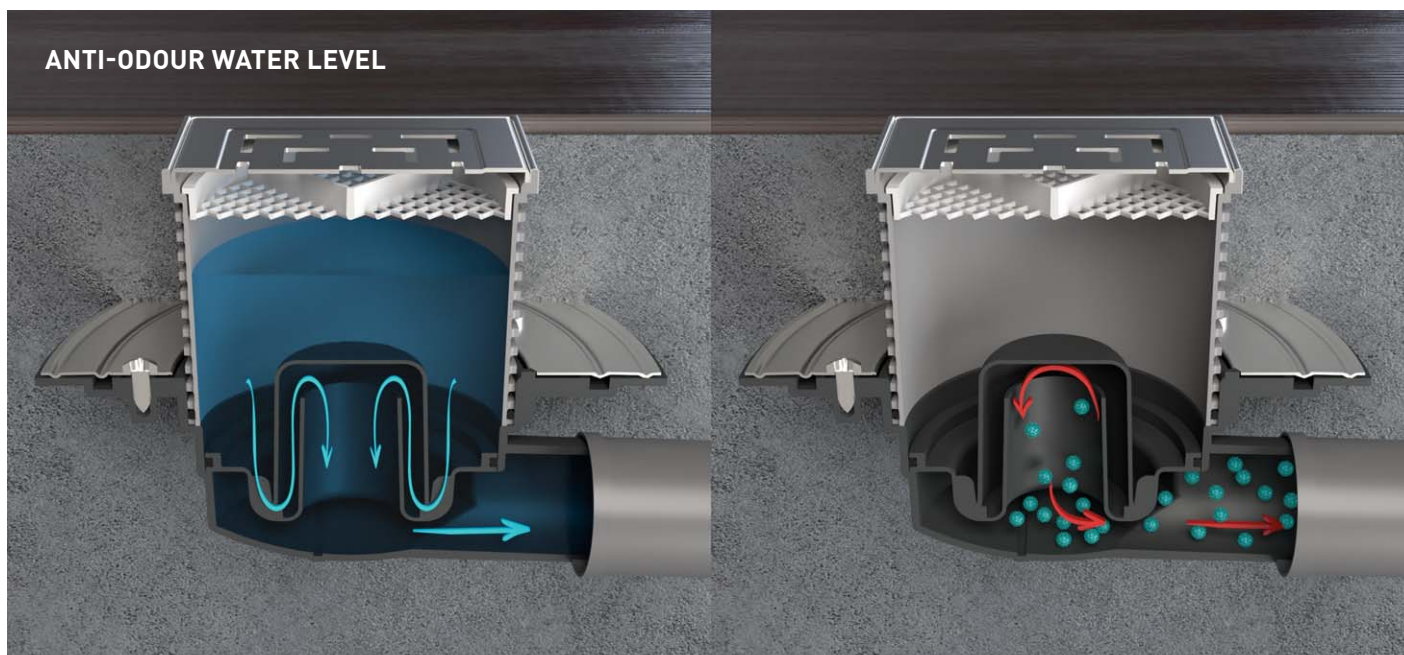
ANTI-ODOUR WATER LEVEL




FLOOR DRAIN WITH SIDE OUTLET DN50 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 Flow rate (water level): 30-42 l/min





		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 411 L L1PVB 50 L	8/192	0,43	-
		L1 411 N L L1PVB 50 N L	8/192	0,43	✓
		F1 411 L F1PVB 50 L	8/192	0,43	-
		F1 411 N L F1PVB 50 N L	8/192	0,43	✓
		G1 411 L G1PVB 50 L	8/192	0,43	-
		G1 411 N L G1PVB 50 N L	8/192	0,43	✓
		411 L PVB 50 L	8/192	0,50	-
		411 N L PVB 50 N L	8/192	0,50	✓

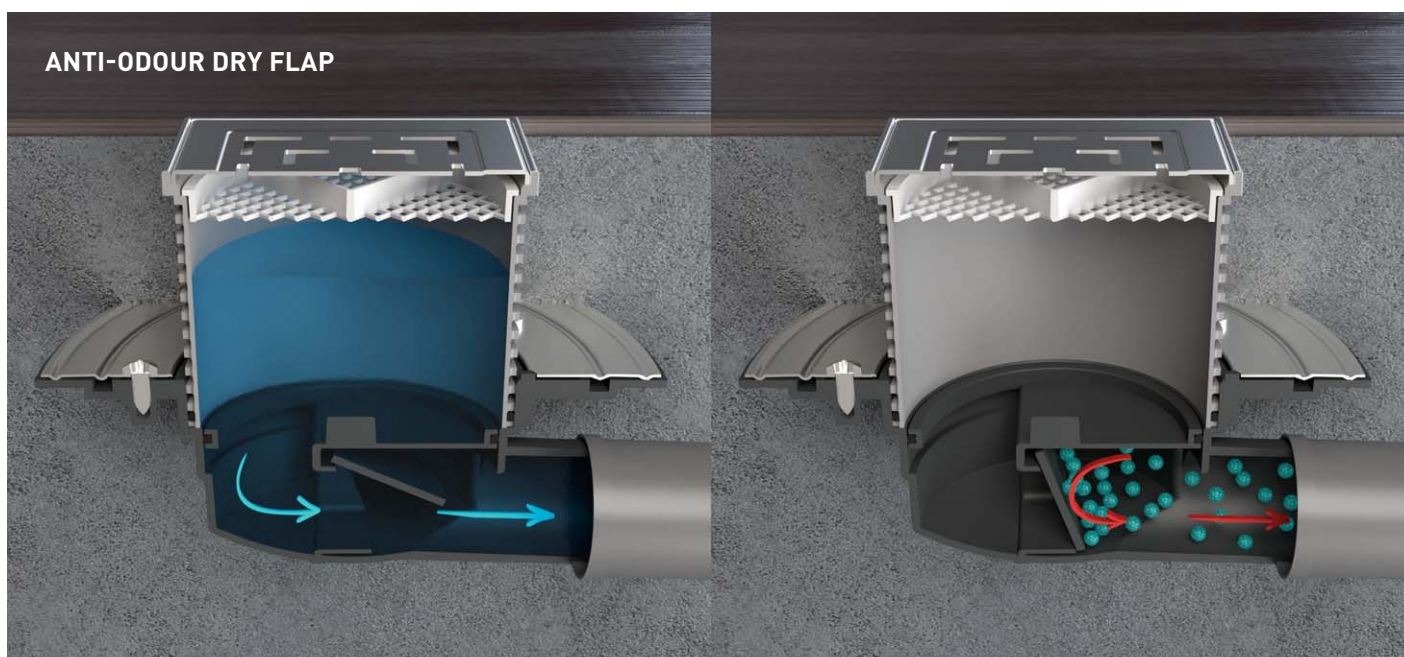

FLOOR DRAIN WITH BOTTOM OUTLET DN50 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 Flow rate (water level): 24-28 l/min





		L1 416 L L1PVS 50 L	8/192	0,47	-
		L1 416 N L L1PVS 50 N L	8/192	0,48	✓
		F1 416 L F1PVS 50 L	8/192	0,47	-
		F1 416 N L F1PVS 50 N L	8/192	0,48	✓
		G1 416 L G1PVS 50 L	8/192	0,47	-
		G1 416 N L G1PVS 50 N L	8/192	0,48	✓
		416 L PVS 50 L	8/192	0,42	-
		416 N L PVS 50 N L	8/192	0,43	✓



FLOOR DRAIN WITH BOTTOM OUTLET DN75 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 Flow rate (water level): 24-31 l/min








		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 417 L L1PVS 75 L	8/192	0,47	-
		L1 417 N L L1PVS 75 N L	8/192	0,48	✓
		F1 417 L F1PVS 75 L	8/192	0,47	-
		F1 417 N L F1PVS 75 N L	8/192	0,48	✓
		G1 417 L G1PVS 75 L	8/192	0,47	-
		G1 417 N L G1PVS 75 N L	8/192	0,48	✓
		417 L PVS 75 L	8/192	0,42	-
		417 N L PVS 75 N L	8/192	0,43	✓



FLOOR DRAIN WITH SIDE OUTLET DN50 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.








💧 **Flow rate (water level):** 44-56 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 425 L L1PVB 50 L2	8/192	0,57	-
		L1 425 N L L1PVB 50 N L2	8/192	0,60	✓
		F1 425 L F1PVB 50 L2	8/192	0,56	-
		F1 425 N L F1PVB 50 N L2	8/192	0,59	✓
		G1 425 L G1PVB 50 L2	8/192	0,57	-
		G1 425 N L G1PVB 50 N L2	8/192	0,60	✓
		425 L PVB 50 L2	8/192	0,56	-
		425 N L PVB 50 N L2	8/192	0,60	✓
		445 L PVB 50 L4	8/192	0,69	✓
		C 425 L CPVB 50 L2	4/168	0,60	✓
		S 425 L SPVB 50 L2	4/168	0,74	✓
		C1 425 L C1PVB 50 L2	4/168	0,74	✓
		S1 425 L S1PVB 50 L2	4/168	0,92	✓

FLOOR DRAIN WITH BOTTOM OUTLET DN50 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.








💧 Flow rate (water level): 61-73 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 420 L L1PVS 50 L2	8/192	0,56	-
		L1 420 N L L1PVS 50 N L2	8/192	0,58	✓
		F1 420 L F1PVS 50 L2	8/192	0,55	-
		F1 420 N L F1PVS 50 N L2	8/192	0,57	✓
		G1 420 L G1PVS 50 L2	8/192	0,56	-
		G1 420 N L G1PVS 50 N L2	8/192	0,58	✓
		420 L PVS 50 L2	8/192	0,61	-
		420 N L PVS 50 N L2	8/192	0,63	✓
		440 L PVS 50 L4	8/192	0,72	✓
		C 420 L CPVS 50 L2	4/168	0,56	✓
		S 420 L SPVS 50 L2	4/168	0,72	✓
		C1 420 L C1PVS 50 L2	4/168	0,71	✓
		S1 420 L S1PVS 50 L2	4/168	0,90	✓

FLOOR DRAIN WITH BOTTOM OUTLET DN110 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

Two options - plastic or stainless steel frame. The collar can be used for connecting a waterproof. or bitumen membrane. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.








💧 **Flow rate (water level):** 38-49 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 421 L L1PVS 110 L2	4/168	0,61	-
		L1 421 N L L1PVS 110 N L2	4/168	0,62	✓
		F1 421 L F1PVS 110 L2	4/168	0,59	-
		F1 421 N L F1PVS 110 N L2	4/168	0,60	✓
		G1 421 L G1PVS 110 L2	4/168	0,59	-
		G1 421 N L G1PVS 110 N L2	4/168	0,60	✓
		421 L PVS 110 L2	4/168	0,63	-
		421 N L PVS 110 N L2	4/168	0,64	✓
		441 L PVS 110 L4	4/168	0,77	✓
Type C 		C 421 L CPVS 110 L2	4/168	0,64	✓
Type S 		S 421 L SPVS 110 L2	4/168	0,81	✓
Type C1 		C1 421 L C1PVS 110 L2	4/168	0,79	✓
Type S1 		S1 421 L S1PVS 110 L2	4/168	0,92	✓

MULTI-INLET FLOOR DRAIN WITH SIDE OUTLET DN75 WITH PLASTIC/STAINLESS STEEL FRAME

This drain allows for connecting multiple waste water systems within the sewage network. The drain body includes an anti-odour water level. If a waterproofing membrane is to be connected, it can be combined with a collar (part number 390). Made of PP and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.













💧 **Flow rate (water level):** 42-56 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
		L1 801 L1PVM 50	4/120	0,74	-
		L1 801 N L1PVM 50 N	4/120	0,77	✓
		F1 801 F1PVM 50	4/120	0,74	-
		F1 801 N F1PVM 50 N	4/120	0,77	✓
		G1 801 G1PVM 50	4/120	0,74	-
		G1 801 N G1PVM 50 N	4/120	0,78	✓
		801 PVM 50	4/120	0,70	-
		801 N PVM 50 N	4/120	0,73	✓
		802 PVM 50 4	4/120	0,82	✓
Type C 	Type S 	C 801 CPVM 50	4/120	0,75	✓
		S 801 SPVM 50	4/120	0,94	✓
Type C1 	Type S1 	C1 801 C1PVM 50	4/120	0,92	✓
		S1 801 S1PVM 50	4/120	1,07	✓

SIDE FLOOR DRAIN - LOW, WITH SIDE OUTLET DN50 WITH COLLAR AND PLASTIC/STAINLESS STEEL FRAME

The benefits include the low installation height. The product is mainly designed for modernisation of bathrooms. Made of PP and stainless steel DIN 1.4301. Load capacity K3-300 kg. Temperature resistance up to 90°C, tested in compliance with EN 1253.

💧 **Flow rate:** 38-44 l/min


		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	STAINLESS STEEL FRAME
 		L1 804 L1SS 50	8/160	0,70	-
		L1 804 N L1SS 50 N	8/160	0,74	✓
 		F1 804 F1SS 50	8/160	0,70	-
		F1 804 N F1SS 50 N	8/160	0,74	✓
 		G1 804 G1SS 50	8/160	0,70	-
		G1 804 N G1SS 50 N	8/160	0,74	✓
 		804 SS 50	8/160	0,70	-
		804 N SS 50 N	8/160	0,74	✓
 		805 SS 50 4	8/160	0,79	✓
Type C	Type S				
 		C 804 CSS 50	8/160	0,75	✓
		S 804 SSS 50	8/160	0,90	✓
Type C1	Type S1				
 		C1 804 C1SS 50	8/160	0,98	✓
		S1 804 S1SS 50	8/160	1,06	✓

SELF-ADHESIVE WATERPROOFING MEMBRANE

A flexible insulation membrane with polypropylene fleece, resistant to perforation, and with butyl rubber glue. The membrane features high adhesion and anti-ageing resistance. It can be applied without preheating, onto clean structural surfaces such as concrete and masonry.


PART NUMBER

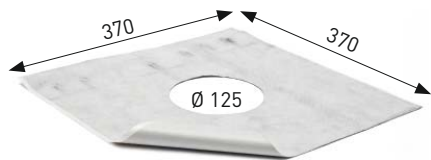SUITABLE FOR TYPE:




391/1

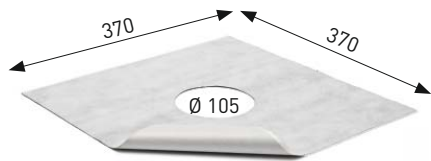420 • 421 • 425 • 441 • 445 • 381 • 382 • 383
384 • 385 • 386 • 388 • 427 • 447 • 801 • 802
804 • 805




391/2

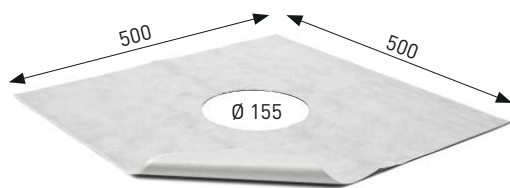411 • 413 • 416 • 417



391/3

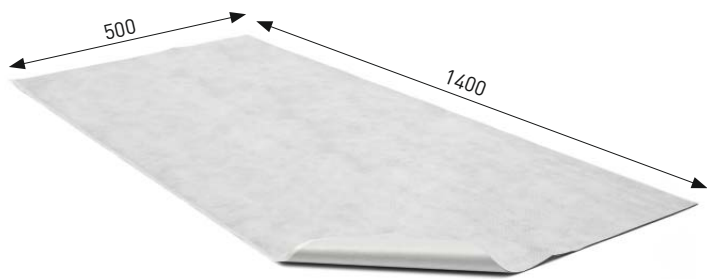332 • 432 • 333 • 433 • 324 • 424 • 727 • 827
334 • 335 • 434 • 436 • 329 • 330 • 429 • 437
731 • 831



391/4



BLACK EDITION





FLOOR DRAINS WITH NEPTUNE FLOAT



UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC FRAME, COLLAR/FLANGE

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253. Stainless steel grids 1.5 mm are provided with polyester thermoset paint. Possibility to order a 5 mm stainless steel grid.

💧 Flow rate (NEPTUNE float): 24-44 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
 		L1 388 A X C L1PVBU 50/75 X C	5/120	0,86	-
		L1 388 B X C L1PVBU 50/75 PR X C	5/120	1,08	✓
 		F1 388 A X C F1PVBU 50/75 X C	5/120	0,86	-
		F1 388 B X C F1PVBU 50/75 PR X C	5/120	1,08	✓
 		G1 388 A X C G1PVBU 50/75 X C	5/120	0,86	-
		G1 388 B X C G1PVBU 50/75 PR X C	5/120	1,08	✓
 		388 A X C PVBU 50/75 X C	5/120	0,86	-
		388 B X C PVBU 50/75 PR X C	5/120	1,08	✓

LABYRINTH



FACE



GATE



SUN



FLOOR DRAINS WITH NEPTUNE FLOAT



UNIVERSAL MULTI-INLET FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTICFRAME, COLLAR/FLANGE

If the water level drops, the NEPTUNE float will close the outlet to prevent the back flow of odour from the sewage line. Made of PP, PS and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 70°C. Tested in compliance with EN 1253. Stainless steel grids 1.5 mm are provided with polyester thermoset paint. Possibility to order a 5 mm stainless steel grid.


**PART NUMBER
NAME**

**PACKAGING
[pcs/pallet]**

**WEIGHT
[kg/pcs]**

FLANGE

💧 **Flow rate (NEPTUNE float):** 24-44 l/min



L1 427 A X C
L1PVP 50/75 X C

5/120

0,88


-

L1 427 B X C
L1PVP 50/75 PR X C

5/120

1,09

✓



F1 427 A X C
F1PVP 50/75 X C

5/120

0,88


-

F1 427 B X C
F1PVP 50/75 PR X C

5/120

1,09

✓



G1 427 A X C
G1PVP 50/75 X C

5/120

0,88


-

G1 427 B X C
G1PVP 50/75 PR X C

5/120

1,09

✓



427 A X C
PVP 50/75 X C

5/120

0,88

-

427 B X C
PVP 50/75 PR X C

5/120

1,09

✓



UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN40 WITH PLASTIC FRAME, COLLAR/FLANGE


The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 56-70 l/min

💧 **Flow rate (water level):** 25-32 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
---------------------	---------------------------	--------------------	--------




L1 382 A C
L1PVBU 40 C

8/160

0,80

-




L1 382 B C
L1PVBU 40 PR C

8/160

0,98

✓




F1 382 A C
F1PVBU 40 C

8/160

0,78

-





F1 382 B C
F1PVBU 40 PR C

8/160

0,97

✓



G1 382 A C
G1PVBU 40 C

8/160

0,80

-



G1 382 B C
G1PVBU 40 PR C

8/160

0,98

✓



382 A C
PVBU 40 C

8/160

0,77

-



382 B C
PVBU 40 PR C

8/160

1,04

✓







UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.


Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 68-82 l/min

💧 **Flow rate (water level):** 30-37 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
  L1 381 A C L1PVBU 50 C	8/160	0,91	-
L1 381 B C L1PVBU 50 PR C	8/160	1,12	✓
  F1 381 A C F1PVBU 50 C	8/160	0,89	-
F1 381 B C F1PVBU 50 PR C	8/160	1,10	✓
  G1 381 A C G1PVBU 50 C	8/160	0,91	-
G1 381 B C G1PVBU 50 PR C	8/160	1,12	✓
  381 A C PVBU 50 C	8/160	0,87	-
381 B C PVBU 50 PR C	8/160	1,14	✓

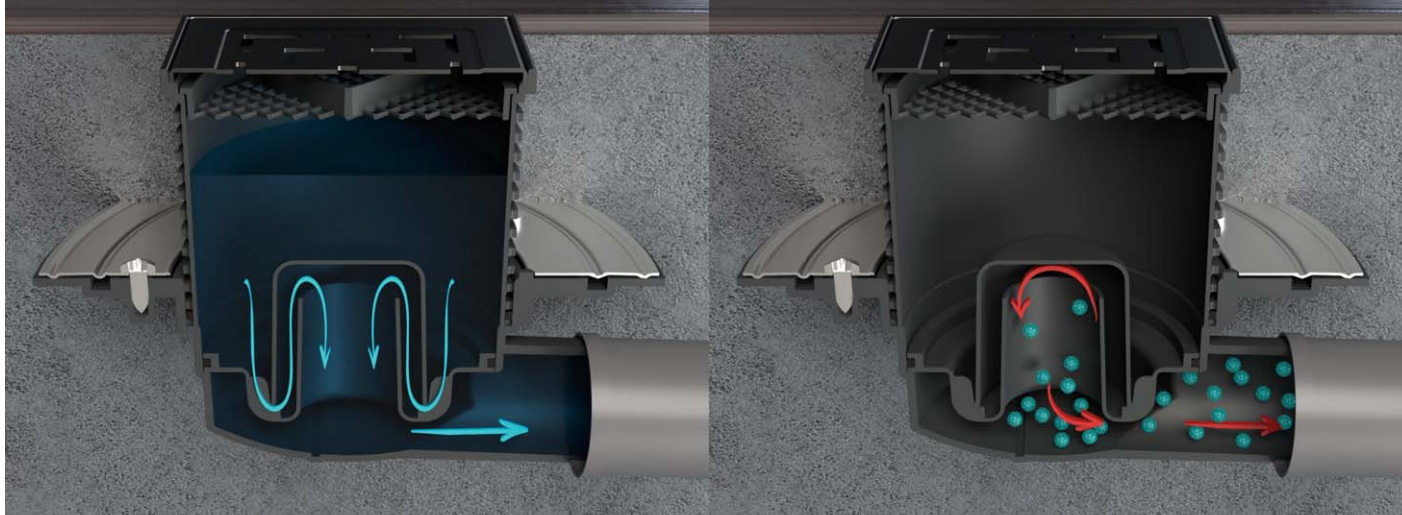ANTI-ODOUR WATER LEVEL



UNIVERSAL FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC FRAME, COLLAR/FLANGE


The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 64-80 l/min

💧 **Flow rate (water level):** 29-36 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
---------------------	---------------------------	--------------------	--------




L1 388 A C
L1PVBU 50/75 C

5/120

0,90

-




F1 388 A C
F1PVBU 50/75 C

5/120

0,90

-




G1 388 A C
G1PVBU 50/75 C

5/120

0,90

-




388 A C
PVBU 50/75 C

5/120

0,90

-





388 B C
PVBU 50/75 PR C

5/120

1,11

✓

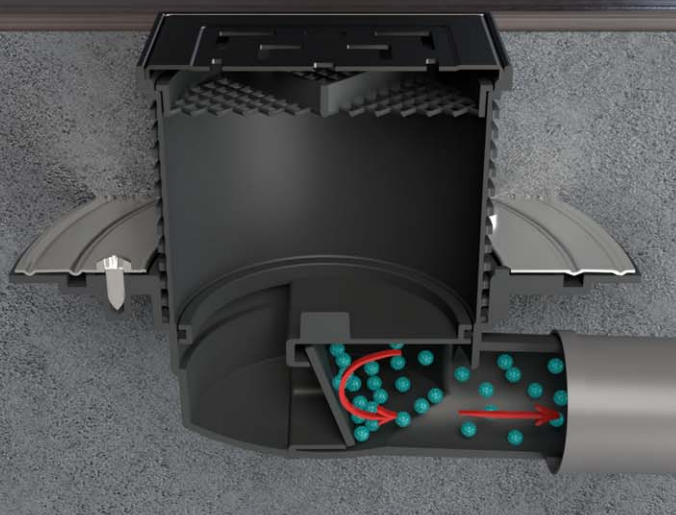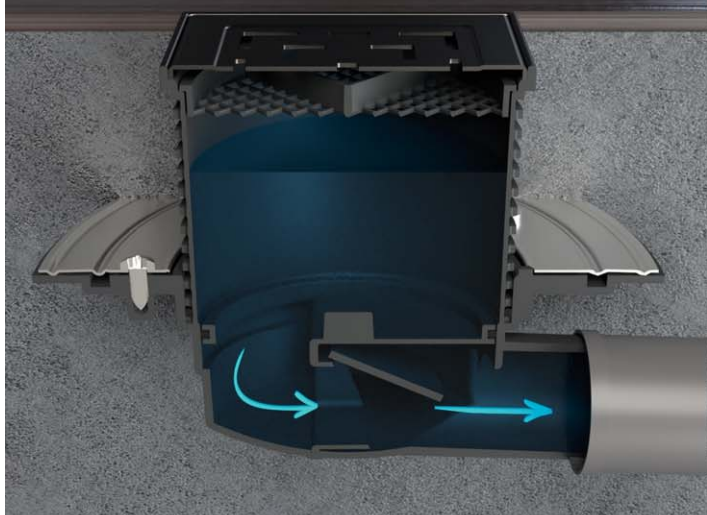ANTI-ODOUR DRY FLAP







UNIVERSAL MULTI-INLET FLOOR DRAIN, SIDE OUTLET DN50/75 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 64-80 l/min

💧 **Flow rate (water level):** 29-36 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
		L1 427 A C L1PVP 50/75 C	5/120	0,93	-
		L1 427 B C L1PVP 50/75 PR C	5/120	1,14	✓
		F1 427 A C F1PVP 50/75 C	5/120	0,93	-
		F1 427 B C F1PVP 50/75 PR C	5/120	1,14	✓
		G1 427 A C G1PVP 50/75 C	5/120	0,93	-
		G1 427 B C G1PVP 50/75 PR C	5/120	1,14	✓
		427 A C PVP 50/75 C	5/120	0,93	-
		427 B C PVP 50/75 PR C	5/120	1,14	✓






UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN40 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 56-70 l/min

💧 **Flow rate (water level):** 30-37 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
  L1 383 A C L1PVSU 40 C	4/120	0,99	-
  L1 383 B C L1PVSU 40 PR C	4/120	1,03	✓
  F1 383 A C F1PVSU 40 C	4/120	0,77	-
  F1 383 B C F1PVSU 40 PR C	4/120	0,98	✓
  G1 383 A C G1PVSU 40 C	4/120	0,98	-
  G1 383 B C G1PVSU 40 PR C	4/120	1,01	✓
  383 A C PVSU 40 C	4/120	0,76	-
  383 B C PVSU 40 PR C	4/120	0,97	✓






UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN50 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 56-70 l/min

💧 **Flow rate (water level):** 30-37 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
  L1 384 A C L1PVSU 50 C	4/120	0,80	-
  L1 384 B C L1PVSU 50 PR C	4/120	1,01	✓
  F1 384 A C F1PVSU 50 C	4/120	0,81	-
  F1 384 B C F1PVSU 50 PR C	4/120	1,02	✓
  G1 384 A C G1PVSU 50 C	4/120	0,80	-
  G1 384 B C G1PVSU 50 PR C	4/120	1,05	✓
  384 A C PVSU 50 C	4/120	0,79	-
  384 B C PVSU 50 PR C	4/120	1,00	✓





UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN75 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 58-72 l/min

💧 **Flow rate (water level):** 32-39 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
		L1 385 A C L1PVSU 75 C	4/120	0,81	-
		L1 385 B C L1PVSU 75 PR C	4/120	1,02	✓
		F1 385 A C F1PVSU 75 C	4/120	0,81	-
		F1 385 B C F1PVSU 75 PR C	4/120	1,02	✓
		G1 385 A C G1PVSU 75 C	4/120	0,81	-
		G1 385 B C G1PVSU 75 PR C	4/120	1,02	✓
		385 A C PVSU 75 C	4/120	0,78	-
		385 B C PVSU 75 PR C	4/120	1,00	✓





UNIVERSAL FLOOR DRAIN, BOTTOM OUTLET DN110 WITH PLASTIC FRAME, COLLAR/FLANGE

The floor drain is designed for indoor and outdoor installations. The packaging includes a dry flap and an anti-odour water level. Made from polypropylene and stainless steel DIN 1.4301. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

Stainless steel grids 1.5 mm are provided with polyester thermo-set paint. Possibility to order a 5 mm stainless steel grid.

💧 **Flow rate (dry flap):** 58-72 l/min

💧 **Flow rate (water level):** 32-39 l/min

		PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	FLANGE
		L1 386 A C L1PVSU 110 C	4/120	0,86	-
		L1 386 B C L1PVSU 110 PR C	4/120	1,06	✓
		F1 386 A C F1PVSU 110 C	4/120	0,86	-
		F1 386 B C F1PVSU 110 PR C	4/120	1,06	✓
		G1 386 A C G1PVSU 110 C	4/120	0,86	-
		G1 386 B C G1PVSU 110 PR C	4/120	1,09	✓
		386 A C PVSU 110 C	4/120	0,83	-
		386 B C PVSU 110 PR C	4/120	1,03	✓

RAINWATER COLLECTORS

A new model of a roof rainwater collector, which is used to drain rain (surface) water into the sewer after connecting a circular or square gutter.


The body of the collector is reinforced with ribbing, which ensures better stability and strength of the product in the ground.

It contains a dry anti-odour flap, which prevents back odour from the sewer pipe.


The new hinged lid system is simpler and allows easy access to a removable basket that prevents dirt from penetrating. The collectors are made in black or gray.

The dimensions of the lower outlet are DN 110 and 125 and with the side DN 110.

- ✓ UV stabilized
- ✓ load capacity K3 (300 kg)
- ✓ anti-odour trap flap
- ✓ black/grey design
- ✓ bottom/side outlet versions
- ✓ dimensions DN110, 125 and 110/125
- ✓ basket with a handle to sift out dirt
- ✓ new reinforced ribbing of the body
- ✓ new opening system
- ✓ pipe catch stop
- ✓ possibility to order a drain cover with a square hole
- ✓ possibility to order a stainless steel basket against rodents



- ✓ **POSSIBILITY TO ORDER THE LID WITH A SQUARE HOLE**
see spare parts on page 76



- ✓ **POSSIBILITY TO ORDER PLASTIC GRID**
see spare parts on page 76




BOTTOM STREET DRAIN, OUTLET DN110

The product is designed for draining rain (surface) water into sewer systems outside buildings, with an option to connect gutter downpipes. It contains a dry anti-odour flap to prevent the odour back flow from the sewage line. The product has an outlet DN110. The eccentric reduction rings of the gutter downpipe in the STANDARD design need to be cut out for the diameter required, 75, 80, 90, 100, 110 or 125 mm. The full version of the drain contains rings with nominal diameters 75, 80, 90, 100, 110 or 125 mm. Made from polypropylene and PS, UV stabilized. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

💧 **Flow rate:** 390 l/min


PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]
---------------------	---------------------------	--------------------

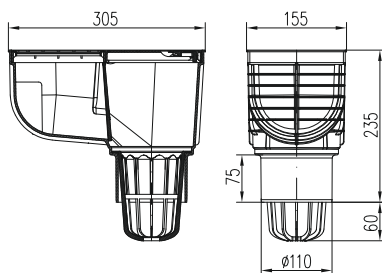

325 E
KV 110 ST

5/120

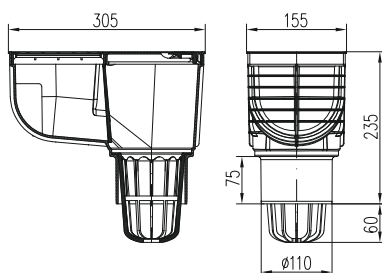
1,03



325 Es
KV 110 ST s

5/120

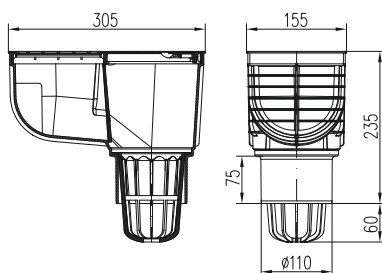
1,05



325 A
KV 110

5/120

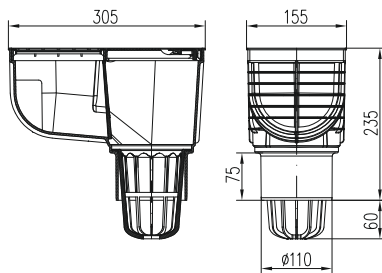1,20



325 As
KV 110 s

5/120


1,20

BOTTOM STREET DRAIN, OUTLET D125

The product is designed for draining rain (surface) water into sewer systems outside buildings, with an option to connect gutter downpipes. It contains a dry anti-odour flap to prevent the odour back flow from the sewage line. The product has an outlet D125. The eccentric reduction rings of the gutter downpipe in the STANDARD design need to be cut out for the diameter required, 75, 80, 90, 100, 110 or 125 mm. The full version of the drain contains rings with nominal diameters 75, 80, 90, 100, 110 or 125 mm. Made from polypropylene and PS, UV stabilized. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

💧 **Flow rate:** 530 l/min


PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]
---------------------	---------------------------	--------------------

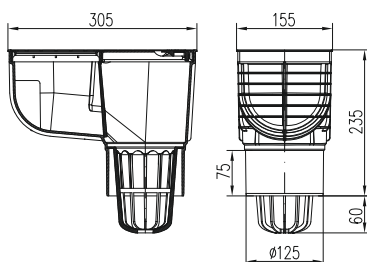

325 F
KV 125 ST

5/120

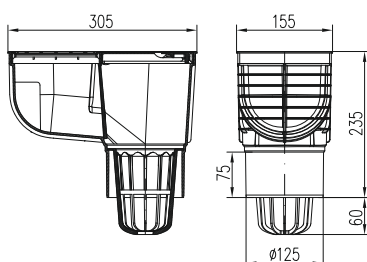
1,09



325 Fs
KV 125 ST s

5/120

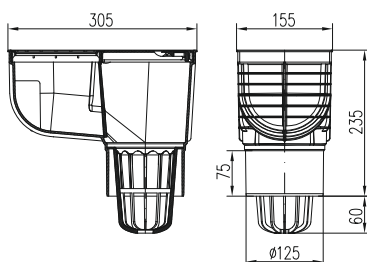
1,14



325 B
KV 125

5/120

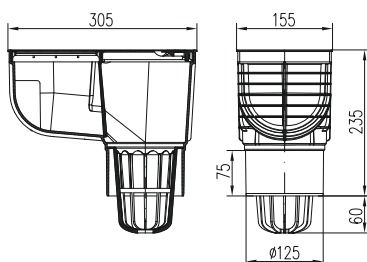1,20



325 Bs
KV 125 s

5/120

1,19

BOTTOM STREET DRAIN, OUTLET D110/125

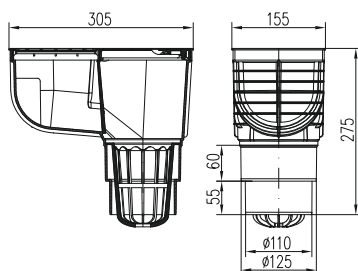
The product is designed for draining rain (surface) water into sewer systems outside buildings, with an option to connect gutter downpipes. It contains a dry anti-odour flap to prevent the odour back flow from the sewage line. The product has a combined outlet D 110/125 mm. The eccentric reduction rings of the gutter downpipe in the STANDARD design need to be cut out for the diameter required 75, 80, 90, 100, 110 or 125 mm. The UNIVERSAL option contains rings with nominal diameters 75, 80, 90, 100, 110 or 125 mm. Made from polypropylene and PS, UV stabilized. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

💧 **Flow rate:** 390/530 l/min

**PART NUMBER
NAME**

**PACKAGING
[pcs/pallet]**


**WEIGHT
[kg/pcs]**



325 S
KV 110/125 ST

4/96

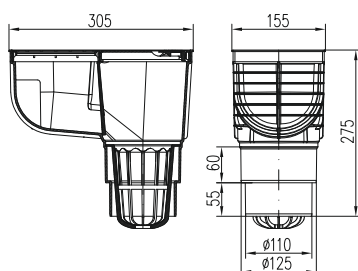
1,02



325 Ss
KV 110/125
ST s

4/96

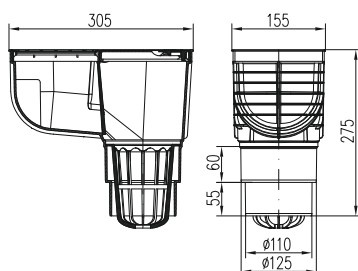
1,03



325 C
KV 110/125

4/96

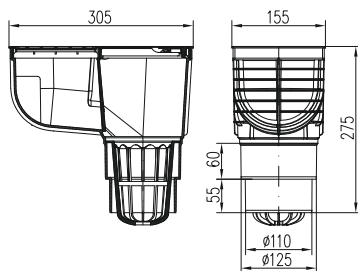1,16



325 Cs
KV 110/125 s

4/96

1,18

SIDE STREET DRAIN, OUTLET D110

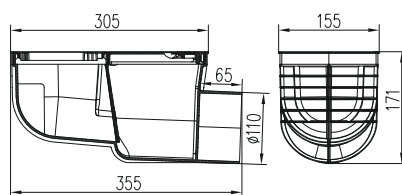
The product is designed for draining rain (surface) water into sewer systems outside buildings, with an option to connect gutter downpipes. It contains a dry anti-odour flap to prevent the odour back flow from the sewage line. The benefits of this product include the low installation height. The product has a side outlet DN110 mm. The eccentric reduction rings of the gutter downpipe in the STANDARD design need to be cut out for the diameter required 75, 80, 90, 100, 110 or 125 mm. There is an option with rings of nominal diameters 75, 80, 90, 100, 110 or 125 mm. Made from polypropylene and PS, UV stabilized. Load capacity K3 (300 kg). Temperature resistance up to 90°C. Tested in compliance with EN 1253.

🚰 **Flow rate:** 375 l/min

**PART NUMBER
NAME**

**PACKAGING
[pcs/pallet]**


**WEIGHT
[kg/pcs]**



325 G
KV 110 B ST

4/120

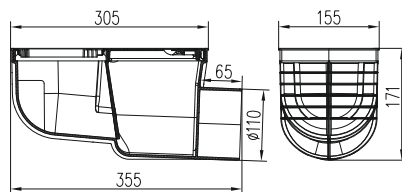
0,97



325 Gs
KV 110 B ST s

4/120

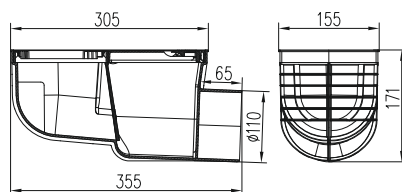
1,00



325 D
KV 110 B

4/120

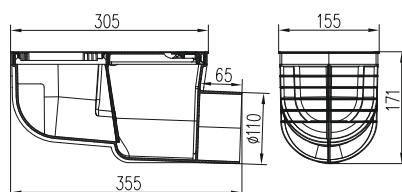1,04



325 Ds
KV 110 B s

4/120

1,05

A close-up photograph of a rainwater collector installed on a concrete wall. The collector is a dark grey, rectangular unit with a grid-like pattern on its front. It is connected to a large, vertical, silver-colored downspout. The unit is mounted on a concrete wall, and the background shows a blue sky and a red structure, possibly a playground or sports equipment.

NEW

**RAINWATER
COLLECTOR
D 160**

BOTTOM STREET DRAIN, OUTLET D 160

NEW

New model large-capacity, plastic roof collector. Produced in two varieties – the first is all plastic and the second is a combination of plastic with a cast-iron upper surface.

The structure of the roof collector is reinforced with ribbing, which ensures greater strength and stability of the product in the ground. Also included is a dry, anti-odour flap to prevent backup odours from the sewer pipe.

The new hinged-lid system is simpler, in order to give easy access to the removable filter basket, preventing dirt from spreading.



Triple protective partition against seepage, dirt collection basket in plastic or stainless steel – made to order.

💧 **Flow rate:** 996 l/min

**PART NUMBER
NAME**

**PACKAGING
[pcs/pallet]**

**WEIGHT
[kg/pcs]**





**925
KV 160**

1/72

1,30

CAST IRON



**925 Li
KV 160 Li**

1/72

3,60



STREET DRAINS



STREET DRAINS

Products containing a dry anti-odour dry flap are designed primarily for outdoor installation.

Street drains equipped with an anti-odour water level are mainly used in the interior of buildings. And the version of the drain with the NEPTUNE float is intended primarily where it prevents possible penetration of odors from the sewer into the interior

- ✓ load capacity K3 (300 kg)
- ✓ load capacity L15 (1 500 kg)
- ✓ load capacity B 125 (12 500 kg)
- ✓ UV stabilized
- ✓ water resistance up to 90 °C
- ✓ in compliance with EN 1253
- ✓ in compliance with EN 124
- ✓ possibility of connecting waterproofing foil









SIDE STREET DRAIN, OUTLET D50 WITH PLASTIC/STAINLESS STEEL/CAST IRON GRID

Made of PP and PS, stainless steel DIN 1.4301 and cast iron DIN 1691. Load capacity K3-300 kg and L15-1 500 kg. Temperature resistance up to 90°C, in the NEPTUNE float up to 70 °C, Tested in compliance with EN 1253.

- Flow rate (dry flap): 93-101 l/min
- Flow rate (water level): 75-83 l/min
- Flow rate (NEPTUNE): 64-70 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION
---------------------	---------------------------	--------------------	--------------------------







		332 S KVB 50 S	6/144	0,82	dry flap
		332 V KVB 50 V	6/144	0,84	water level
		332 X KVB 50 X	6/144	0,96	NEPTUNE float
		332 S N KVB 50 S N	6/144	0,96	dry flap
		332 V N KVB 50 V N	6/144	0,98	water level
		332 X N KVB 50 X N	6/144	1,03	NEPTUNE float
		332 S Li KVB 50 S Li	6/144	1,82	dry flap
		332 V Li KVB 50 V Li	6/144	1,86	water level
		332 X Li KVB 50 X Li	6/144	1,85	NEPTUNE float
		432 S KVB/L 50 S	1/48	1,10	dry flap
		432 V KVB/L 50 V	1/48	1,10	water level
		432 X KVB/L 50 X	1/48	1,10	NEPTUNE float
		432 S N KVB/L 50 S N	1/48	1,19	dry flap
		432 V N KVB/L 50 V N	1/48	1,20	water level
		432 X N KVB/L 50 X N	1/48	1,20	NEPTUNE float
		432 S Li KVB/L 50 S Li	1/48	2,10	dry flap
		432 V Li KVB/L 50 V Li	1/48	2,10	water level
		432 X Li KVB/L 50 X Li	1/48	2,10	NEPTUNE float

SIDE STREET DRAIN, OUTLET D75 WITH PLASTIC/STAINLESS STEEL/CAST IRON GRID

Made of PP and PS, stainless steel DIN 1.4301 and cast iron DIN 1691. Load capacity K3-300 kg and L15-1 500 kg. Temperature resistance up to 90°C, in the NEPTUNE float up to 70 °C, Tested in compliance with EN 1253.

- Flow rate (dry flap): 98-108 l/min
- Flow rate (water level): 94-97 l/min
- Flow rate (NEPTUNE): 69-76 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION
---------------------	---------------------------	--------------------	--------------------------







		333 S KVB 75 S	6/144	0,87	dry flap
		333 V KVB 75 V	6/144	0,87	water level
		333 X KVB 75 X	6/144	0,88	NEPTUNE float
		333 S N KVB 75 S N	6/144	0,99	dry flap
		333 V N KVB 75 V N	6/144	1,04	water level
		333 X N KVB 75 X N	6/144	1,04	NEPTUNE float
		333 S Li KVB 75 S Li	6/144	1,89	dry flap
		333 V Li KVB 75 V Li	6/144	1,95	water level
		333 X Li KVB 75 X Li	6/144	1,95	NEPTUNE float
		433 S KVB/L 75 S	1/48	1,10	dry flap
		433 V KVB/L 75 V	1/48	1,10	water level
		433 X KVB/L 75 X	1/48	1,14	NEPTUNE float
		433 S N KVB/L 75 S N	1/48	1,13	dry flap
		433 V N KVB/L 75 V N	1/48	1,13	water level
		433 X N KVB/L 75 X N	1/48	1,13	NEPTUNE float
		433 S Li KVB/L 75 S Li	1/48	2,09	dry flap
		433 V Li KVB/L 75 V Li	1/48	2,09	water level
		433 X Li KVB/L 75 X Li	1/48	2,01	NEPTUNE float

SIDE STREET DRAIN, OUTLET D110 WITH PLASTIC/STAINLESS STEEL/CAST IRON GRID

Made of PP and PS, stainless steel DIN 1.4301 and cast iron DIN 1691. Load capacity K3-300 kg and L15-1 500 kg. Temperature resistance up to 90°C, in the NEPTUNE float up to 70 °C, Tested in compliance with EN 1253.

- Flow rate (dry flap): 160-183 l/min
- Flow rate (water level): 98-104 l/min
- Flow rate (NEPTUNE): 76-80 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION
---------------------	---------------------------	--------------------	--------------------------







		324 S KVB 110 S	6/144	0,90	dry flap
		324 V KVB 110 V	6/144	0,92	water level
		324 X KVB 110 X	6/144	0,90	NEPTUNE float
		324 S N KVB 110 S N	6/144	0,98	dry flap
		324 V N KVB 110 V N	6/144	1,01	water level
		324 X N KVB 110 X N	6/144	1,00	NEPTUNE float
 CAST IRON		324 S Li KVB 110 S Li	6/144	1,88	dry flap
		324 V Li KVB 110 V Li	6/144	1,90	water level
		324 X Li KVB 110 X Li	6/144	1,90	NEPTUNE float
		424 S KVB/L 110 S	1/48	1,14	dry flap
		424 V KVB/L 110 V	1/48	1,15	water level
		424 X KVB/L 110 X	1/48	1,14	NEPTUNE float
		424 S N KVB/L 110 S N	1/48	1,23	dry flap
		424 V N KVB/L 110 V N	1/48	1,29	water level
		424 X N KVB/L 110 X N	1/48	1,24	NEPTUNE float
 CAST IRON		424 S Li KVB/L 110 S Li	1/48	2,13	dry flap
		424 V Li KVB/L 110 V Li	1/48	2,04	water level
		424 X Li KVB/L 110 X Li	1/48	2,02	NEPTUNE float

BOTTOM STREET DRAIN, OUTLET D110 WITH PLASTIC/STAINLESS STEEL/CAST IRON GRID

Made of PP and PS, stainless steel DIN 1.4301 and cast iron DIN 1691. Load capacity K3-300 kg and L15-1 500 kg. Temperature resistance up to 90°C, in the NEPTUNE float up to 70 °C, Tested in compliance with EN 1253.

- Flow rate (dry flap): 170-193 l/min
- Flow rate (water level): 108-114 l/min
- Flow rate (NEPTUNE): 86-90 l/min

PART NUMBER NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION
---------------------	---------------------------	--------------------	--------------------------

		727 S KVS 110 S	6/144	0,85	dry flap
		727 V KVS 110 V	6/144	0,87	water level
		727 X KVS 110 X	6/144	0,85	NEPTUNE float
		727 S N KVS 110 S N	6/144	0,85	dry flap
		727 V N KVS 110 V N	6/144	0,93	water level
		727 X N KVS 110 X N	6/144	0,96	NEPTUNE float
		727 S Li KVS 110 S Li	6/144	1,83	dry flap
		727 V Li KVS 110 V Li	6/144	1,85	water level
		727 X Li KVS 110 X Li	6/144	1,85	NEPTUNE float
		827 S KVS/L 110 S	4/72	1,09	dry flap
		827 V KVS/L 110 V	4/72	1,10	water level
		827 X KVS/L 110 X	4/72	1,09	NEPTUNE float
		827 S N KVS/L 110 S N	4/72	1,18	dry flap
		827 V N KVS/L 110 V N	4/72	1,24	water level
		827 X N KVS/L 110 X N	4/72	1,19	NEPTUNE float
		827 S Li KVS/L 110 S Li	4/72	2,08	dry flap
		827 V Li KVS/L 110 V Li	4/72	1,99	water level
		827 X Li KVS/L 110 X Li	4/72	1,97	NEPTUNE float

SIDE STREET DRAIN, OUTLET D75-250 WITH PLASTIC/CAST IRON GRID

Made from PP and PS, UV stabilized, and from grey cast iron DIN 1691. Load capacity compliant to EN 124-B 125 (12 500 kg) and a plastic grid made from PP compliant to EN 1253 L15 (1,500 kg). Temperature resistance up to 90°C, in the option with the NEPTUNE float up to 70°C.

- Flow rate (dry flap): 172-185 l/min
- Flow rate (water level): 92-100 l/min
- Flow rate (NEPTUNE): 83-89 l/min




PART NUMBER NAME	PACKA- GING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION	SAFETY SCREWS
334 S KVB 75/250 S Li	1/48	6,74	dry flap	-
334 V KVB 75/250 V Li	1/48	6,74	water level	-
334 X KVB 75/250 X Li	1/48	6,79	NEPTUNE float	-
334 Sz KVB 75/250 S Li z	1/48	6,84	dry flap	✓
334 Vz KVB 75/250 V Li z	1/48	6,84	water level	✓
334 Xz KVB 75/250 X Li z	1/48	6,82	NEPTUNE float	✓
335 S KVB 75/250 S P	1/48	1,92	dry flap	-
335 V KVB 75/250 V P	1/48	1,92	water level	-
335 X KVB 75/250 X P	1/48	1,94	NEPTUNE float	-
335 Sz KVB 75/250 S P z	1/48	1,96	dry flap	✓
335 Vz KVB 75/250 V P z	1/48	2,00	water level	✓
335 Xz KVB 75/250 X P z	1/48	1,75	NEPTUNE float	✓
434 S KVB/L 75/250 S Li	1/48	6,75	dry flap	-
434 V KVB/L 75/250 V Li	1/48	6,75	water level	-
434 X KVB/L 75/250 X Li	1/48	6,78	NEPTUNE float	-
434 Sz KVB/L 75/250 S Li z	1/48	6,73	dry flap	✓
434 Vz KVB/L 75/250 V Li z	1/48	6,73	water level	✓
434 Xz KVB/L 75/250 X Li z	1/48	6,83	NEPTUNE float	✓
436 S KVB/L 75/250 S P	1/48	1,92	dry flap	-
436 V KVB/L 75/250 V P	1/48	1,92	water level	-
436 X KVB/L 75/250 X P	1/48	1,94	NEPTUNE float	-
436 Sz KVB/L 75/250 S P z	1/48	1,96	dry flap	✓
436 Vz KVB/L 75/250 V P z	1/48	2,00	water level	✓
436 Xz KVB/L 75/250 X P z	1/48	1,75	NEPTUNE float	✓

SIDE STREET DRAIN, OUTLET D110-250 WITH PLASTIC/CAST IRON GRID

Made from PP and PS, UV stabilized, and from grey cast iron DIN 1691. Load capacity compliant to EN 124-B 125 (12 500 kg) and a plastic grid made from PP compliant to EN 1253 L15 (1,500 kg). Temperature resistance up to 90°C, in the option with the NEPTUNE float up to 70°C.



- Flow rate (dry flap): 185-200 l/min
- Flow rate (water level): 102-115 l/min
- Flow rate (NEPTUNE): 83-89 l/min

CAST IRON



PART NUMBER NAME	PACKA- GING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION	SAFETY SCREWS
329 S KVB 110/250 S Li	1/48	6,75	dry flap	-
329 V KVB 110/250 V Li	1/48	6,84	water level	-
329 X KVB 110/250 X Li	1/48	6,81	NEPTUNE float	-
329 Sz KVB 110/250 S Li z	1/48	6,67	dry flap	✓
329 Vz KVB 110/250 V Li z	1/48	6,96	water level	✓
329 Xz KVB 110/250 X Li z	1/48	6,72	NEPTUNE float	✓
330 S KVB 110/250 S P	1/48	1,94	dry flap	-
330 V KVB 110/250 V P	1/48	2,00	water level	-
330 X KVB 110/250 X P	1/48	1,81	NEPTUNE float	-
330 Sz KVB 110/250 S P z	1/48	1,98	dry flap	✓
330 Vz KVB 110/250 V P z	1/48	2,02	water level	✓
330 Xz KVB 110/250 X P z	1/48	1,76	NEPTUNE float	✓
429 S KVB/L 110/250 S Li	1/48	6,86	dry flap	-
429 V KVB/L 110/250 V Li	1/48	6,88	water level	-
429 X KVB/L 110/250 X Li	1/48	6,82	NEPTUNE float	-
429 Sz KVB/L 110/250 S Li z	1/48	6,90	dry flap	✓
429 Vz KVB/L 110/250 V Li z	1/48	6,84	water level	✓
429 Xz KVB/L 110/250 X Li z	1/48	6,77	NEPTUNE float	✓
437 S KVB/L 110/250 S P	1/48	1,76	dry flap	-
437 V KVB/L 110/250 V P	1/48	1,78	water level	-
437 X KVB/L 110/250 X P	1/48	1,80	NEPTUNE float	-
437 Sz KVB/L 110/250 S P z	1/48	1,78	dry flap	✓
437 Vz KVB/L 110/250 V P z	1/48	1,78	water level	✓
437 Xz KVB/L 110/250 X P z	1/48	1,81	NEPTUNE float	✓


CAST IRON



BOTTOM STREET DRAIN, OUTLET D110-250 WITH PLASTIC/CAST IRON GRID

Made from PP and PS, UV stabilized, and from grey cast iron DIN 1691. Load capacity compliant to EN 124-B 125 (12 500 kg) and a plastic grid made from PP compliant to EN 1253 L15 (1,500 kg). Temperature resistance up to 90°C, in the option with the NEPTUNE float up to 70°C.

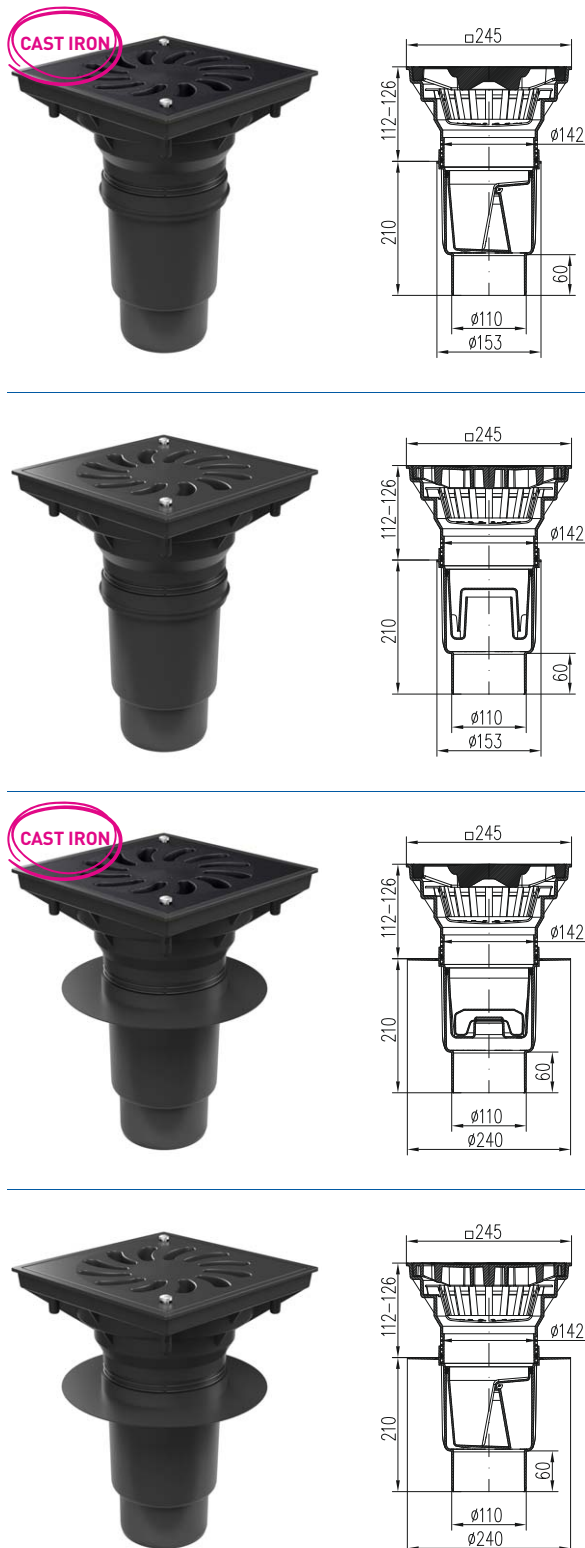- Flow rate (dry flap): 190-210 l/min
- Flow rate (water level): 112-125 l/min
- Flow rate (NEPTUNE): 90-98 l/min



PART NUMBER NAME	PACKA- GING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION	SAFETY SCREWS
731 S KVS 110/250 S Li	1/48	6,70	dry flap	-
731 V KVS 110/250 V Li	1/48	6,79	water level	-
731 X KVS 110/250 X Li	1/48	6,76	NEPTUNE float	-
731 Sz KVS 110/250 S Li z	1/48	6,62	dry flap	✓
731 Vz KVS 110/250 V Li z	1/48	6,94	water level	✓
731 Xz KVS 110/250 X Li z	1/48	6,67	NEPTUNE float	✓
731 S P KVS 110/250 S P	1/48	1,89	dry flap	-
731 V P KVS 110/250 V P	1/48	1,95	water level	-
731 X P KVS 110/250 X P	1/48	1,76	NEPTUNE float	-
731 S Pz KVS 110/250 S P z	1/48	1,93	dry flap	✓
731 V Pz KVS 110/250 V P z	1/48	1,70	water level	✓
731 X Pz KVS 110/250 X P z	1/48	1,71	NEPTUNE float	✓
831 S KVS/L 110/250 S Li	1/48	6,81	dry flap	-
831 V KVS/L 110/250 V Li	1/48	6,83	water level	-
831 X KVS/L 110/250 X Li	1/48	6,77	NEPTUNE float	-
831 Sz KVS/L 110/250 S Li z	1/48	6,85	dry flap	✓
831 Vz KVS/L 110/250 V Li z	1/48	6,79	water level	✓
831 Xz KVS/L 110/250 X Li z	1/48	6,72	NEPTUNE float	✓
831 S P KVS/L 110/250 S P	1/48	1,71	dry flap	-
831 V P KVS/L 110/250 V P	1/48	1,73	water level	-
831 X P KVS/L 110/250 X P	1/48	1,75	NEPTUNE float	-
831 S Pz KVS/L 110/250 S P z	1/48	1,73	dry flap	✓
831 V Pz KVS/L 110/250 V P z	1/48	1,73	water level	✓
831 X Pz KVS/L 110/250 X P z	1/48	1,76	NEPTUNE float	✓

BOTTOM STREET DRAIN, OUTLET D160/D110-250 WITH PLASTIC/CAST IRON GRID

Made of PP and PS, UV stabilized, and from grey cast iron DIN 1691. Load capacity compliant to EN 124-B 125 (12,500 kg) and a plastic grid made from polypropylene compliant to EN 1253 L15 (1,500 kg). Temperature resistance up to 90°C.

💧 **Flow rate (dry flap):** 250 l/min

**PART NUMBER
NAME**


**PACKA-
GING**
[pcs/pallet]

WEIGHT
[kg/pcs]

**ANTI-ODOUR
PROTECTION**

**SAFETY
SCREWS**

CAST IRON



328
KVS 160 S Li


1/48

7,35

dry flap

–

CAST IRON




328 z
KVS 160 S Li z

1/48

7,00

dry flap

✓




328 P
KVS 160 S P

1/48

1,96

dry flap

–



328 Pz
KVS 160 S P z

1/48

1,98

dry flap





✓

BOTTOM STREET DRAIN, OUTLET D160/D110-250 WITH CAST IRON FRAME AND PLASTIC/CAST IRON GRID

These products are suitable for incorporation into the spaces that are in direct contact with the asphalt surface.

Made of PP and PS, UV stabilized, and from grey cast iron DIN 1691. Load capacity compliant to EN 124-B 125 (12,500 kg) and a plastic grid made from polypropylene compliant to EN 1253 L15 (1,500 kg). Temperature resistance up to 90°C.

💧 Flow rate (dry flap): 250 l/min

	PART NUMBER NAME	PACKA- GING [pcs/pallet]	WEIGHT [kg/pcs]	ANTI-ODOUR PROTECTION	SAFETY SCREWS
  	M 328 KVS/M 160 S Li	1/48	11,72	dry flap	-
  	M 328 z KVS/M 160 S Li z	1/48	11,76	dry flap	✓
  	M 328 P KVS/M 160 S P	1/48	6,89	dry flap	-
  	M 328 Pz KVS/M 160 S P z	1/48	6,92	dry flap	✓

EXTERIOR GUTTER D110 WITH WITH ZINC-PLATED/CAST IRON GRID

The exterior gutter CH 1001 with a cast iron grid is suitable for draining water from construction sites, areas used by pedestrians and cyclists, as well as for driveways, pathways, parking lots etc. Loading capacity B (testing force 125 kN). Made from HD-PE, UV stabilized, and from grey cast iron DIN 1691. Loading capacity compliant to EN 1433-B 125 (12, 500 kg).



PART Nr. NAME	PACKAGING [pcs/pallet]	WEIGHT [kg/pcs]	LOAD CAPACITY
CH 1000 Zinc plated grid	1/54	2,73	1 500 kg
CH 1001 Cast iron grid	1/54	7,50	12 500 kg

ACCESSORIES







CH 1003 Side connecting set DN110	–	–	–
--	---	---	---



CH 1004 Bottom connec- ting set DN110	–	–	–
--	---	---	---



CH 1005 Cross transition piece	–	–	–
---	---	---	---

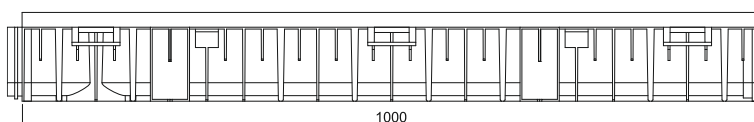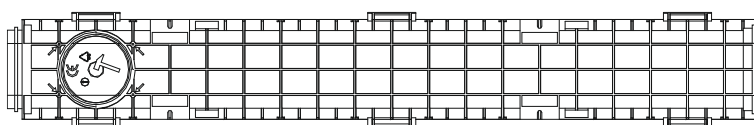

ROOF DRAINS




VORTEX GRAVITY ROOF DRAINS D75/D110/D125

The gravity roof drains are designed for draining rainwater from flat roofs, compliant to EN 1253. The upper inlet basket prevents dirt from entering. For options Vortex SVG 004, 005 and 006, the packaging contains a self-regulating heating cable with 10 W of heating output to prevent the roof inlet from freezing.

- 💧 Flow rate (D 75): 355 l/min
- 💧 Flow rate (D 110): 395 l/min
- 💧 Flow rate (D 125): 550 l/min

PART NUMBER OUTLET	PACKAGING [pcs]	WEIGHT [kg/pcs]	HEATING CABLE
-----------------------	--------------------	--------------------	------------------




SVG 001
D 75

1

1,60

–



SVG 002
D 110

1

1,60


–

SVG 005
D 110

1

1,90

✓



SVG 003
D 125

1

1,60


–

SVG 006
D 125

1

1,90

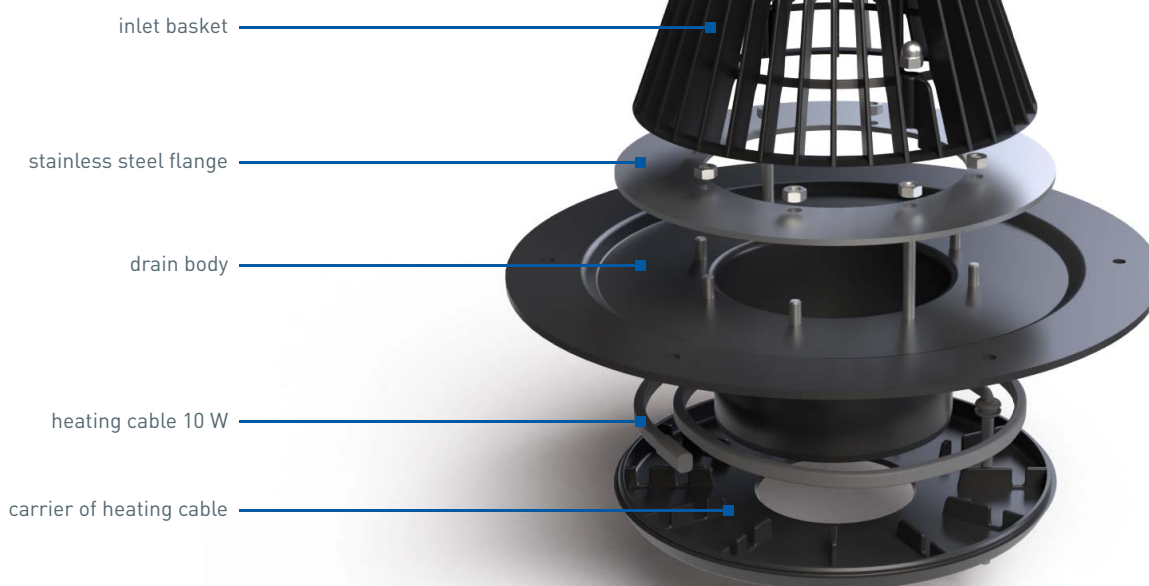
✓



HYDROMAX ROOF DRAIN D75

The siphonic roof drains were designed specifically to drain rainwater effectively from flat roofs, compliant to EN 1253. The Hydromax drain is made from HDPE, UV stabilized, and the packaging contains a stainless steel flange, screws and nuts compliant to DIN 1.4301. For Hydromax SV 002, the packaging includes a self-regulating heating with 10 W of heating output to prevent the roof inlet from freezing. For bitumen roofing, 600 x 600 mm segment from stainless steel can be ordered.

💧 **Flow rate:** up to 1200 l/min




PART NUMBER OUTLET	PACKAGING [pcs]	WEIGHT [kg/pcs]	HEATING CABLE
SV 001 D 75	1	2,00	-
SV 002 D 75	1	2,20	✓

HYDROMAX
roof drains

In the mild rain or drizzle, the function of the siphonic system for draining rainwater is the same as in the gravity system. On the contrary, in the case of heavy rain or flood-litter, the small diameter is filled with water very quickly, thus a network of piping filled with water is created. In the vertical drain the water will quickly fall down, similarly to the cylinder in the engine; as a result underpressure is formed in the piping system.

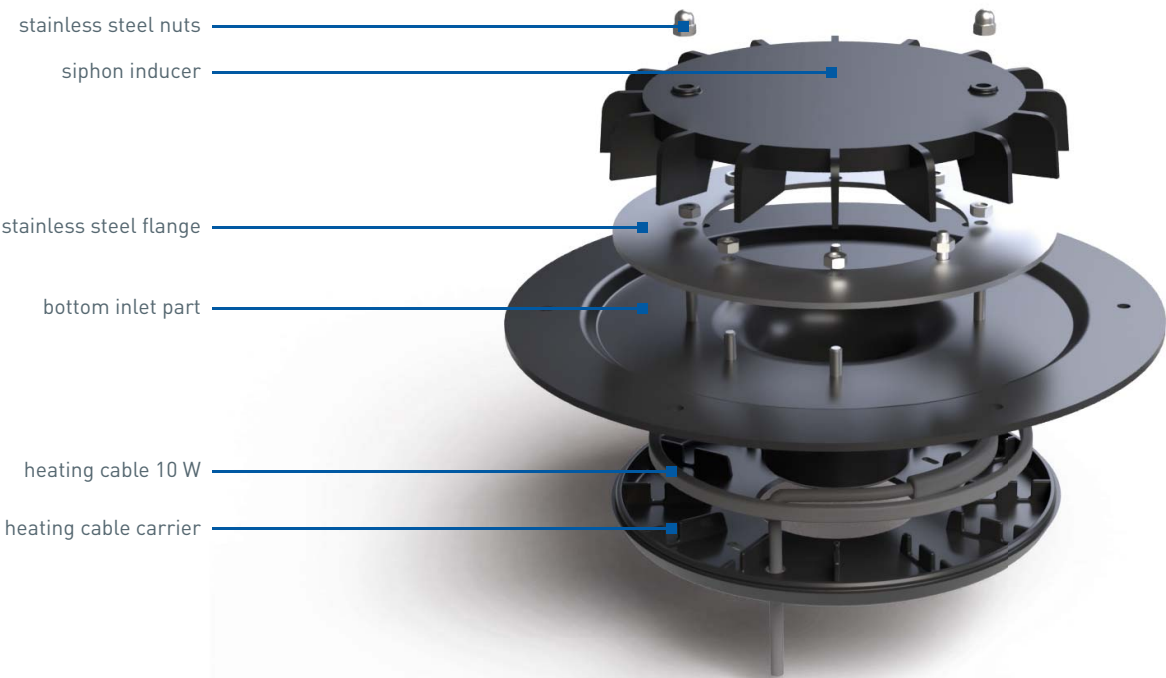HYDROMAX roof drains are main components of the siphonic roof drain systems. This type of roof drain contains a special flap that prevents air from entering. This causes an even flow of water within the piping system.





STAINLESS STEEL DRAINAGE CHANNEL - COVE

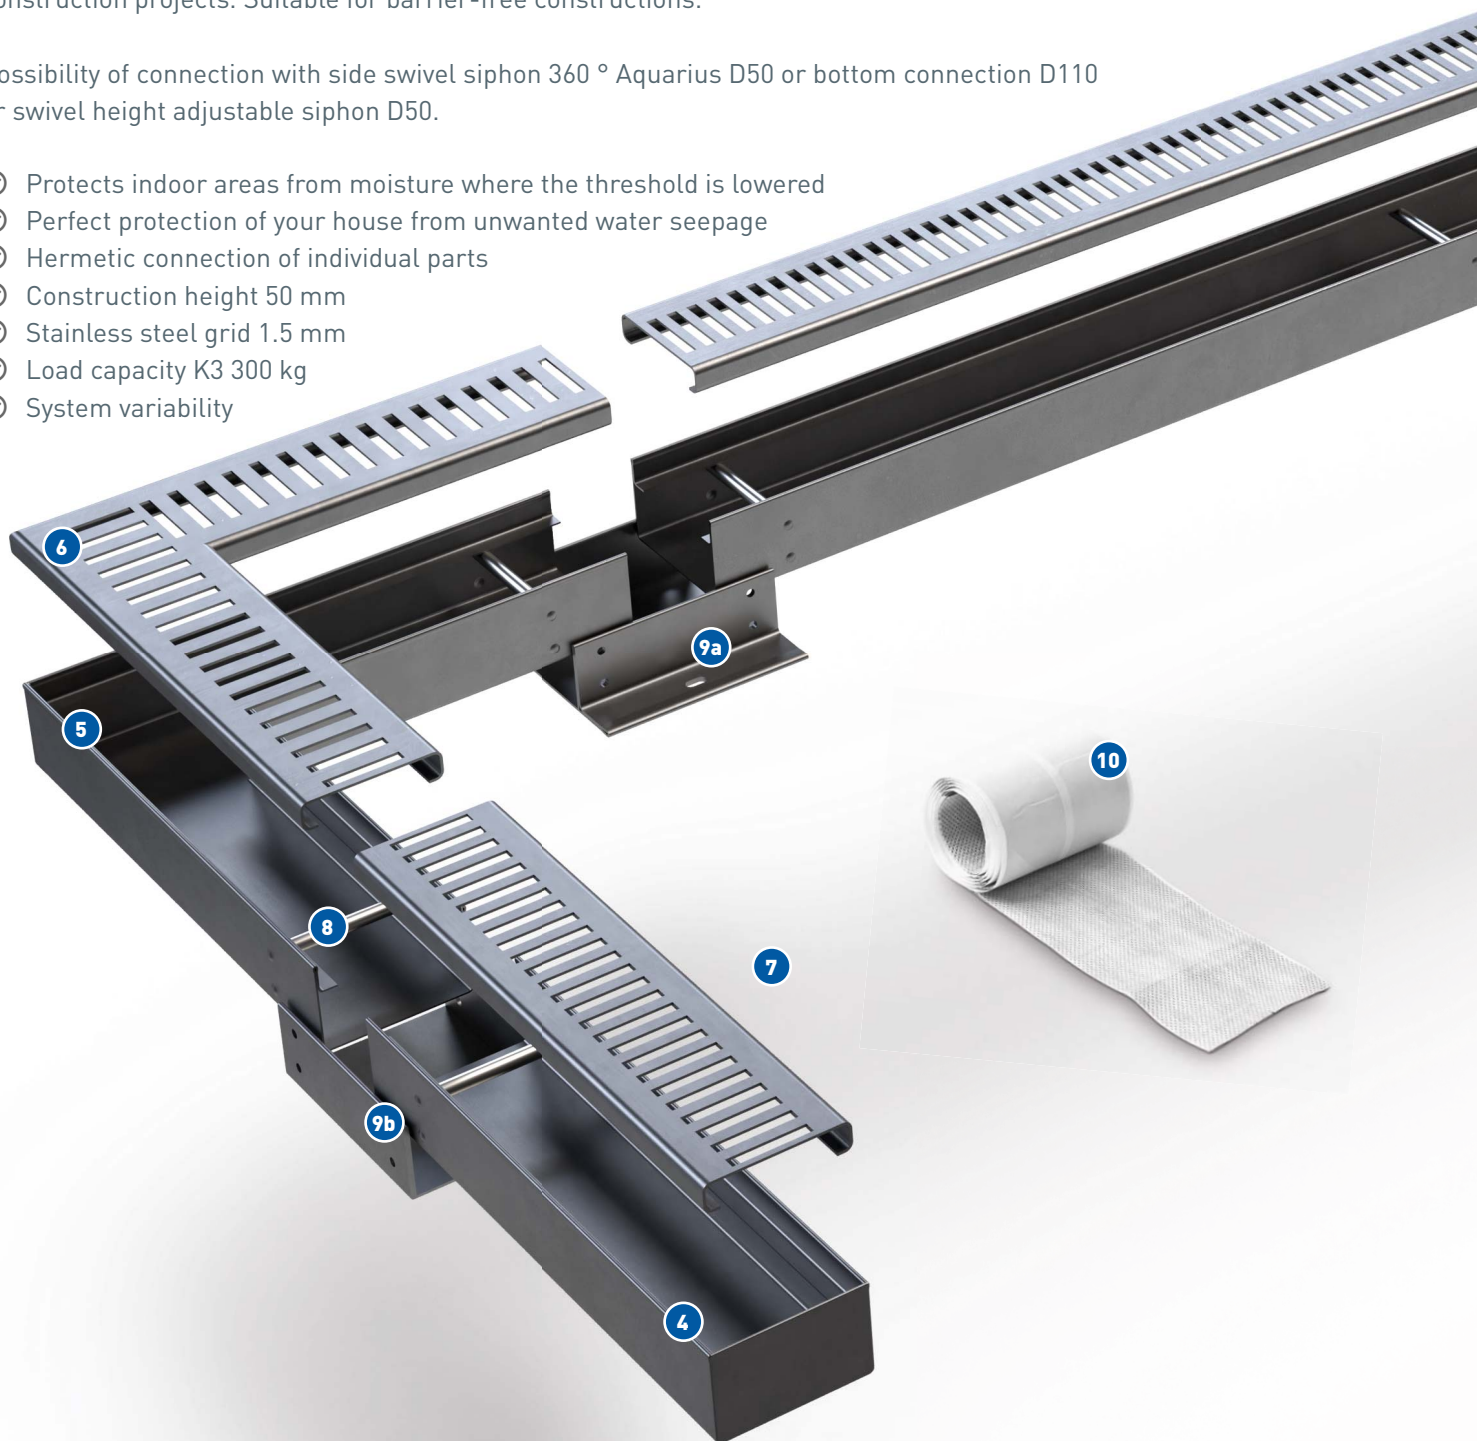
STAINLESS STEEL DRAINAGE CHANNEL COVE

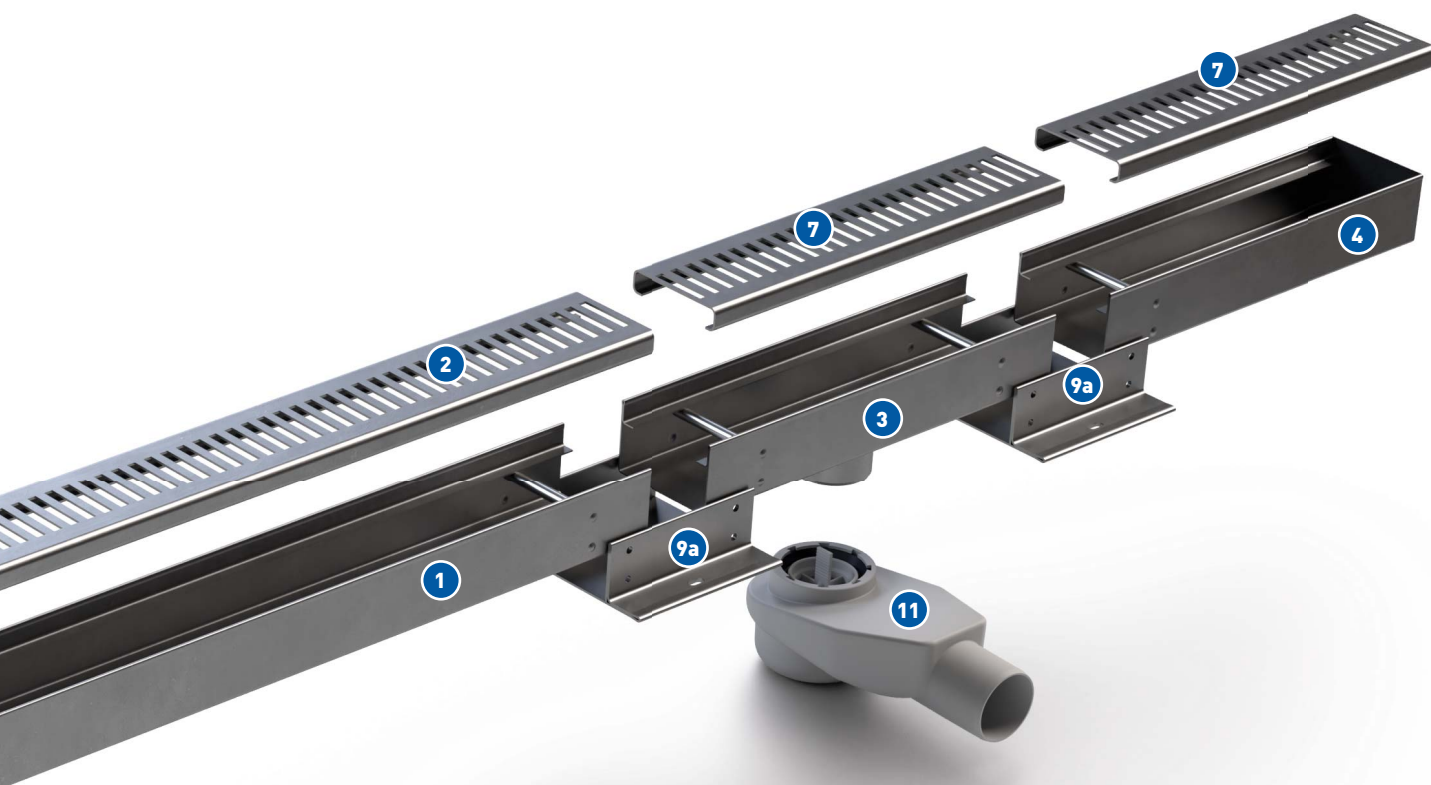
It safely ensures fast removal of extreme rainfall in sensitive areas such as door structures, terraces and balconies.

It is made of stainless steel DIN 1.4301 AISI 304 and can be used for architecturally demanding construction projects. Suitable for barrier-free constructions.

Possibility of connection with side swivel siphon 360 ° Aquarius D50 or bottom connection D110 or swivel height adjustable siphon D50.



- ✓ Protects indoor areas from moisture where the threshold is lowered
- ✓ Perfect protection of your house from unwanted water seepage
- ✓ Hermetic connection of individual parts
- ✓ Construction height 50 mm
- ✓ Stainless steel grid 1.5 mm
- ✓ Load capacity K3 300 kg
- ✓ System variability






- 1** Stainless steel drainage without grid (1000 x 80 x 50 mm)
- 2** Stainless steel grid (1000 mm)
- 3** Stainless steel drainage with outlet D50 (300 x 80 x 50 mm)
- 4** Stainless steel drainage end piece right / left (300 x 80 x 50 mm)
- 5** Stainless steel drainage corner without grid (300/300 x 80 x 50 mm)
- 6** Stainless steel corner grid (300/300 mm)
- 7** Stainless steel grid (300 mm)
- 8** Stainless steel inner strut (8 x 80 mm)
- 9a** Stainless steel connector
- 9b** Stainless steel connector to the wall
- 10** Self-adhesive waterproofing foil (1000 x 80 mm)
- 11** Swivel siphon Aquarius D50 with silicone membrane

	PRODUCT	ORDER NR.
	Stainless steel drainage channel with grid 1000 x 80 x 50 mm (3 spacers + foil)	CH N 1000
	Stainless steel drainage with outlet D50 and with grid 300 x 80 x 50 mm (2 spacers)	CH N 1001
	Stainless steel drainage end piece right / left with grid 300 x 80 x 50 mm (1 spacer)	CH N 1002
	Stainless steel drainage corner with grid 300/300 x 80 x 50 mm (2 spacers)	CH N 1003
	Stainless steel connector with insulation	CH N 1004
	Stainless steel connector to the wall with insulation	CH N 1005
	Swivel siphon Aquarius D50 with silicone membrane	3002
	Swivel siphon D50, height adjustable	804/4

SPARE PARTS FOR FLOOR DRAINS		ORDER NR.
	Grid Labyrinth 1,5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 L/1 380 L/1 C (black)
	Grid Face 1,5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 F/1 380 F/1 C (black)
	Grid Gate 1,5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 G/1 380 G/1 C (black)
	Stainless steel grid (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 380 C (black)
	Stainless steel grid round (D 137) 320 • 321 • 323 • 326 • 440 • 445 • 441 • 381 • 382 • 383 • 384 • 385 386 • 447 • 802 • 805 • 332 • 432 • 333 • 433 • 324 • 424 • 727 • 731 827 • 831 • 447	347
	Pedestal for tiles (125 x 125) C 420 • C 425 • C 421 L • C 382 • C 383 • C 384 • C 385 • C 386 • C 427 C 801 • C 804 • C 388	386/9N
	Stainless steel attachment (125 x 125) S 420 • S 425 • S 421 L • S 382 • S 383 • S 384 • S 385 • S 386 • S 427 S 801 • S 804 • S 388	386/9S
	Pedestal for tiles (150 x 150) C1 420 • C1 425 • C1 421 L • C1 382 • C1 383 • C1 384 • C1 385 • C1 386 C1 427 • C1 801 • C1 804 • C1 388	387/3N
	Stainless steel attachment (150 x 150) S1 420 • S1 425 • S1 421 L • S1 382 • S1 383 • S1 384 • S1 385 • S1 386 S1 427 • S1 801 • S1 804 • S1 388	387/3S
	Grid Labyrinth 5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 L
	Grid Face 5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 F
	Grid Gate 5 mm (125 x 125) 420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 801 • 804	380 G

	Plastic grid (300 x 300)	371/1
	220	
	Plastic grid (250 x 250)	371/2
	221	
	Plastic grid (200 x 200)	371/3
	222	
	Plastic grid (low)	371
	320 • 326	
	Plastic grid (high)	343
	321 • 323	
	Plastic grid, black (high)	343/5
	323	
	Grid Labyrinth 1,5 mm (100 x 100)	375 L/1
	411 • 413 • 416 • 417	
	Grid Face 1,5 mm (100 x 100)	375 F/1
	411 • 413 • 416 • 417	
	Grid Gate 1,5 mm (100 x 100)	375 G/1
	411 • 413 • 416 • 417	
	Stainless steel grid (100 x 100)	375/0
	411 • 413 • 416 • 417	
	Grid Face 5 mm (100 x 100)	375 F
	411 • 413 • 416 • 417	
	Grid Labyrinth 5 mm (100 x 100)	375 L
	411 • 413 • 416 • 417	
	Grid Gate 5 mm (100 x 100)	375 G
	411 • 413 • 416 • 417	
	Attachment for stainless steel grid (125 x 125)	386/0
	420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427	386/0 (black)
	Attachment with stainless steel frame for stainless steel grid (125 x 125)	386 N
	420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427	



Attachment for stainless steel grid (round)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427

386/3



Attachment for stainless steel grid (150 x 150)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 447

386/5



Attachment for stainless steel grid (100 x 100)

411 • 413 • 416 • 417

374/1



Attachment with stainless steel frame for stainless steel grid (100 x 100)

411 • 413 • 416 • 417

374 N



Attachment with stainless steel frame for tiles (125 x 125)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427

387 C



Attachment with stainless steel frame and stainless steel grid (125 x 125)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427

387 S



Attachment with stainless steel frame for tiles (150 x 150)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427

387 C1



Attachment with stainless steel frame and stainless steel grid (150 x 150)

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427

387 S1



Extension to the attachment

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 • 427 • 447

389



Sifter big

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 427 • 447 • 388

327
327 C (black)



Sifter small

411 • 413 • 416 • 417

377




Anti-odour closing trap (low)

320 • 326

344

	Anti-odour closing trap (high) 321 • 323	348 (white) 348/5 (black)
	Anti-odour closing trap 411 • 413	373/0
	Anti-odour closing trap PVS D 50, D 75 100x100 416 • 417	385/1
	Anti-odour closing trap (low) 420 • 440 • 425 • 445	321/0
	Anti-odour closing trap (high) 421 • 441	320/0
	NEPTUNE float big 320 X N • 326 X N	344/5
	NEPTUNE float small 420 X • 440 X • 425 X • 445 X • 388 X • 427 X • 447 X	321/5 321/5 C (black)
	Anti-odour closing trap NEPTUNE PVP/ PVBU 50/75 427 • 447 • 388	388/33 388/33 C (black)
	Water level (lowered) 382	383/5
	Water level 381 • 383 • 384 • 385 • 386	383
	Water level 416 • 417	385/9
	Water level PVP/PVBU 50/75 427 • 447 • 388	388/32
	Dry flap PVP/ PVBU 50/75 427 • 447 • 388	388/31
	Dry flap 381 • 382 • 383 • 384 • 385 • 386	384
	Stainless steel flange (+5 screws) 381 • 382 • 383 • 384 • 385 • 386 • 388 • 427 • 447	393



Collar for insulation (220 x 220, D115) incl. sealing ring

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 •
427 • 447

390



Spring for securing the insulating collar

420 • 425 • 421 • 381 • 382 • 383 • 384 • 385 • 386 • 801 • 804 • 388 •
427 • 447

390/1



Sealing ring 90 x 3,5 mm

411 • 413 • 416 • 417

388/2



Sealing ring 80 x 3,5 mm

416 • 417

388/1



Sealing ring 107 x 3,5 mm

420 • 421 • 440 • 441 • 420 • 440 • 425 • 445 • 801 • 804 • 388 • 427 •
447

388/3



Sealing kit PVBu/PVSU - 2 pcs

381 • 382 • 383 • 384 • 385 • 386

388/22



Sealing kit PVP, PVBu 50/75

424 • 447 • 388

388/23



Stainless steel key for grid removing

387/1

SPARE PARTS FOR RAINWATER COLLECTORS AND STREET DRAINS

ORDER NR.



Plastic grid 150 x 150

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

350



Stainless steel grid round (D 137)

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

347



Cast iron grid 150 x 150

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

341/1



Cast iron grid 250 x 250

334 • 434 • 329 • 429 • 731 • 831 • 328

341/2



Cast iron grid 250 x 250 with holes for for safety screws

334 • 434 • 329 • 429 • 731 • 831 • 328

341/3



Plastic grid 250 x 250

334 • 434 • 329 • 429 • 731 • 831 • 328


350/1



Plastic grid 250 x 250 with holes for for safety screws

334 • 434 • 329 • 429 • 731 • 831 • 328

350/2

	Stainless steel bolts (2 pcs) + Torx key 334 • 434 • 329 • 429 • 731 • 831 • 328	341/6
	Grid 325	334 334/5 (gray)
	Plastic cover 325	332 332/5 (gray)
	Plastic drain cover 325	333 333/5 (gray)
	Reduction ring for rainwater collector 325	339 339/5 (gray)
	Set - drain cover + drain insert - square KV110, KV125, (1 + 1 pcs) 325	333/7 333/8 (gray)
	Reduction rings rainwater collector 325	338 338/5 (gray)
	Anti-odour dry flap 325	335
	Anti-odour dry flap 327 • 331	355/4
	Anti-odour dry flap 328	355/5
	Anti-odour dry flap 332 • 432 • 333 • 433 • 324 • 424 • 727 • 827 • 334 • 434 • 329 • 429 • 731 831	355
	Water level 332 • 432 • 333 • 433 • 324 • 424 • 727 • 827 • 334 • 434 • 329 • 429 • 731 831	357
	NEPTUNE float 332 • 432 • 333 • 433 • 324 • 424 • 727 • 827 • 334 • 434 • 329 • 429 • 731 831	358
	Basket 325	337
	Stainless steel basket 325	337/1



Basket

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

352/2



Stainless steel basket for KVB, KVS

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

352/2 N



Basket

334 • 434 • 329 • 429 • 731 • 831 • 328

352/5



Attachment (150x150)

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

359



Attachment, stainless steel frame (150x150)

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827

354



Attachment (250 x 250)

334 • 434 • 329 • 429 • 731 • 831 • 328

359/1



Sealing kit KVB/KVS - 2 pcs

332 • 432 • 333 • 433 • 324 • 424 • 727 • 827 334 • 434 • 329 • 429 • 731
831 • 328

388/9



Plastic hinged lid with clip KV160

925

930/1



Flap KV160

925

930/3



Basket KV160

925

930/4



Drain cover insert KV160

925

930/6

SPARE PARTS FOR ROOF DRAINS

ORDER NR.



10 W heating cable (total length 2,7m; heating part 0,7m)

SV 003



A carrier of heating cable

D 75: 511/1
D 110: 511/2
D 125: 511/3



600 x 600 Stainless steel segment

SV 004



Inlet basket

510



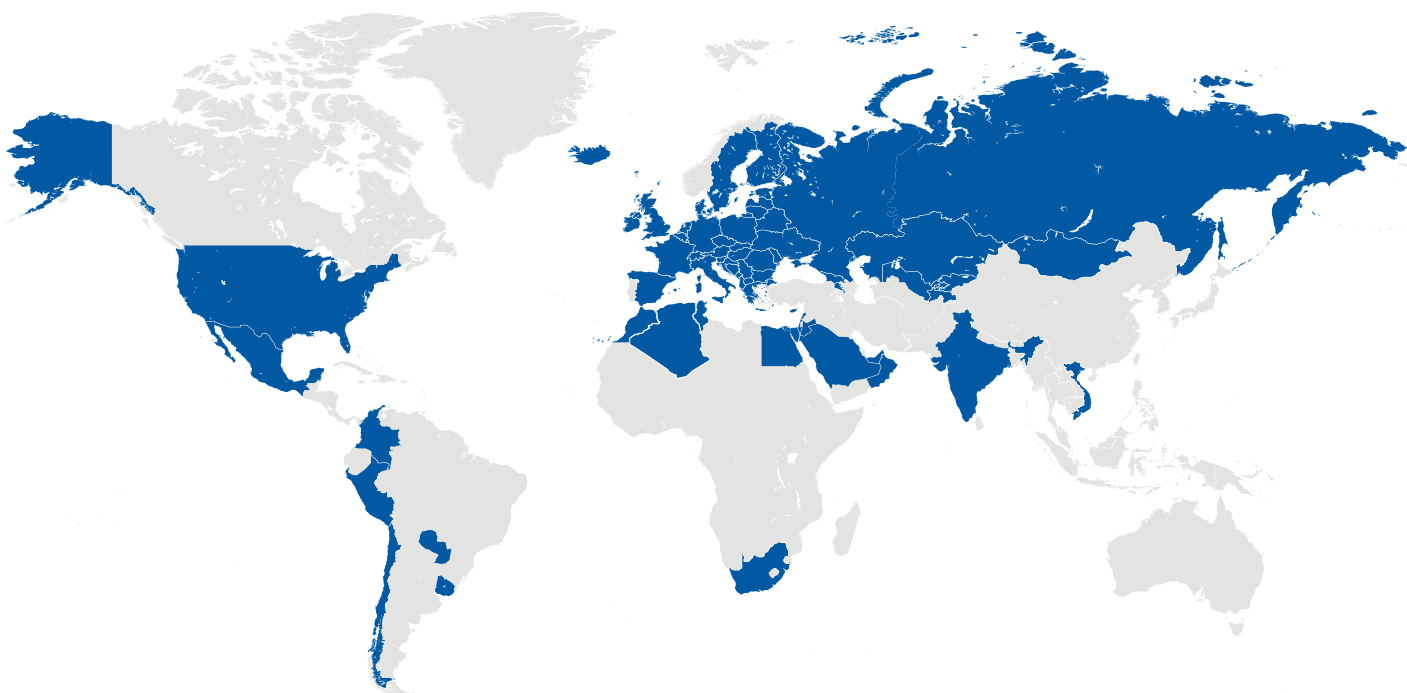
Stainless steel flange with nuts

507



Hydromax inducer

501



CHUDĚJ s.r.o.

Hutisko 310
756 62 Hutisko-Solanec
Czech Republic
Tel.: +420 723 126 125 • +420 571 757 745
export@chudej.cz
WWW.CHUDEJ.EU

Company owner:

Miroslav Chuděj
Phone: +420 571 757 730
chudej@chudej.cz

Assistant of export director:

Ing. Vendula Žatková
Phone: +420 571 757 745
info@chudej.cz

Export director:

Ing. Karel Hák
Phone: +420 723 126 125
Phone: +420 774 557 994
export@chudej.cz

Manager for Western Balkan:

Bekim Hasani
Phone: +386 49 112 080
Phone: +383 49 112 080
bh@chudej.cz

Assistant of export director:

Bc. Dominika Jahodová
Phone.: +420 777 706 766
Phone: +420 571 757 745
trade@chudej.cz

Financial department:

Alena Randýsková
randyskova@chudej.cz



CHUDEJ s.r.o.

Hutisko 310
756 62 Hutisko-Solanec
Czech Republic
Tel.: +420 723 126 125 • +420 571 757 745
Fax: +420 571 757 737
export@chudej.cz
WWW.CHUDEJ.EU



BIM READY

 **bimproject.cloud**