
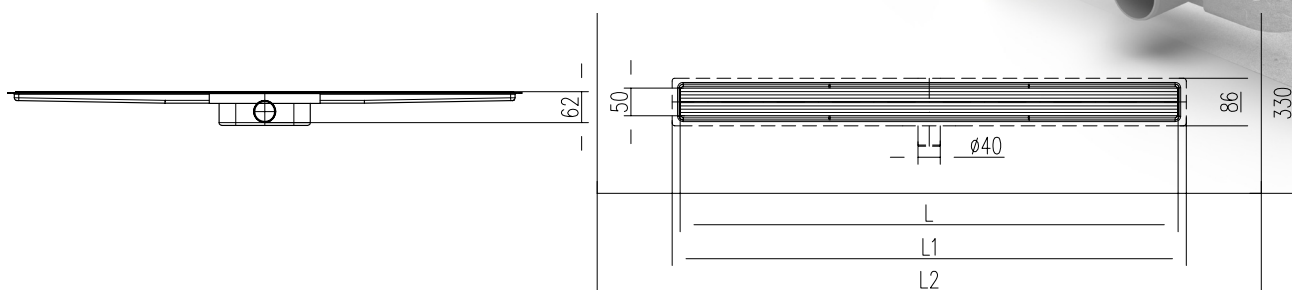


Lineární nerezový žlab Aquarius D40 s izolací

průtok ≈ 30-34 l/min | **min. stavební výška:** 62 mm | **průměr odtoku:** 40 mm

Aquarius je díky špičkové moderní technologii ochranou Vaší koupelny před nežádoucími průsaky vody. Těleso žlabu je lisováno jako jeden kus. Hydroizolační membránová fólie je hermeticky spojena již během výroby.

Naše nová technologie zjednodušuje proces výroby a montáže a posouvá jeho možnosti na novou úroveň. Nová dimenze moderní koupelny nyní přináší neomezené možnosti dokonalé harmonie designu a funkčnosti. Vyrobeno z nerezové oceli dle DIN 1.4401 AISI 316.

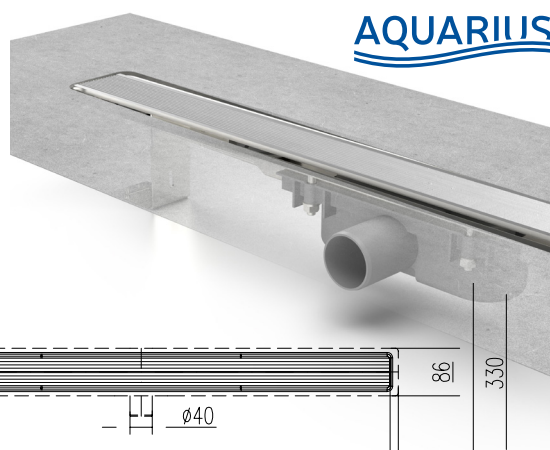

ROZMĚRY ŽLABU

L	700 mm	800 mm	900 mm
L1	735 mm	835 mm	936 mm
L2	1 000 mm	1 100 mm	1 200 mm
Hmotnost [1 ks] ALU lišta	1,58 kg	1,71 kg	1,85 kg
Hmotnost [1 ks] ALU lišta + nerez	1,99 kg	2,17 kg	2,36 kg

VLASTNOSTI ŽLABU

- určeno pro interiéry
- nízká stavební výška 62 mm
- lisované těleso bez svárů
- bez limitu výšky obkladu
- stavěcí podpěry lze nastavit na libovolnou výšku ALU lišty
- na montážní ALU lištu lze nalepit dlažbu, sklo, nerez lištu
- průtok lineárního žlabu 30-34 l/min. dle normy EN 1253
- zatížení lineárního žlabu K3 (300 kg)
- vyrobeno z vysoce odolné nerez oceli DIN 1.4401 AISI 316
- rozměrová řada 700, 800, 900 mm
- snadná demontáž při čištění sifonu
- patentovaný odtokový sifon

NÁHRADNÍ DÍLY

	obj. číslo
Klíč pro vyjmutí lišty – nerezový	387/1
ALU lišta včetně 4 stavěcích podpěr 695, 795, 895 mm	3005, 3006, 3007
Stavěcí podpěra ALU lišty	3008
Stavěcí podložka podpěry	3009
Nerezový pás 1,5 mm pro nalepení na ALU lištu 700, 800, 900 mm	3013, 3014, 3015
Nerezová podpěra pro lineární žlab	3038

ALU lišta pro nalepení
obkladu (skla)



ALU lišta + nerez 1,5 mm



NÁVOD
na instalaci




Stainless steel linear drain Aquarius D40 with waterproof membrane




flow rate ~ 30-34 l/min | **lowest installation height:** 62 mm | **outlet diameter:** 40 mm

Aquarius protects your bathroom from unwanted water leaks thanks to cutting-edge modern technology. The drain body is pressed as one piece. The waterproofing membrane is hermetically connected already during production.

Our new technology simplifies the production and installation process and elevates its possibilities to a new level. The new dimension of the modern bathroom now offers unlimited possibilities for perfect harmony between design and functionality. Made of stainless steel according to DIN 1.4401 AISI 316.

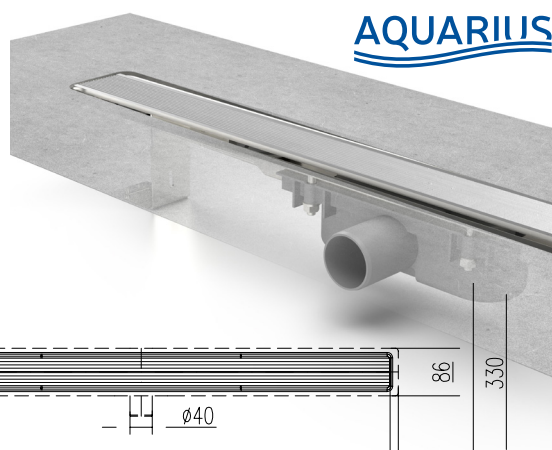

AQUARIUS

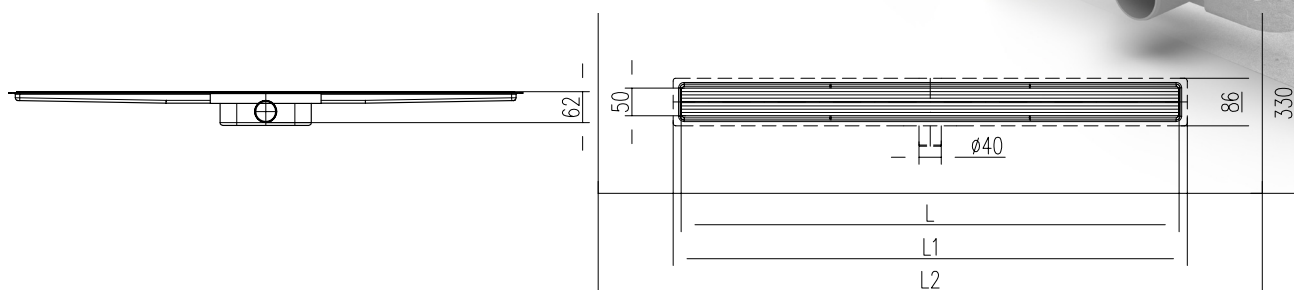

DRAIN DIMENSIONS

L	700 mm	800 mm	900 mm
L1	735 mm	835 mm	936 mm
L2	1000 mm	1100 mm	1200 mm
Weight [1 pc] ALU rail	1,58 kg	1,71 kg	1,85 kg
Weight [1 pc] ALU rail + stainless steel	1,99 kg	2,17 kg	2,36 kg

FEATURES OF THE DRAIN

- designed for interior
- low installation height 62 mm
- pressed body without welds
- no limit on tile height
- adjustable supports for any ALU mounting rail height
- tiles, glass, stainless steel plate can be glued to the ALU mounting rail
- linear drain flow rate 30-34 l/min according to EN 1253
- load class K3 (300 kg)
- made of highly durable stainless steel DIN 1.4401 AISI 316
- available sizes 700, 800, 900 mm
- easy disassembly for siphon cleaning
- patented drain siphon

SPARE PARTS

	order no.
Key for ALU rail removal - stainless steel	387/1
ALU rail including 4 adjustable supports 695, 795, 895 mm	3005, 3006, 3007
Adjustable support for ALU rail	3008
Pad for adjustable support	3009
1,5 mm stainless steel plate for gluing onto the ALU rail 700, 800, 900 mm	3013, 3014, 3015
Stainless steel adjustable legs for linear drains	3038

ALU rail for gluing
tiles (glass)



ALU rail
+ stainless steel 1,5 mm



INSTRUCTIONS
for installation

